



Catalog

Softstarters

Type PSR, PSS, PSE, PST and PSTB

www.nicsanat.com
021-87700210



Power and productivity
for a better world™



Efficient PSE range – world's first compact softstarter with torque control

The latest addition to ABB's softstarter family is the efficient PSE range. This softstarter has been equipped with all the most important features making it a very efficient choice. During the development process, great focus has been put into making sure that both the softstarter and the process are even more reliable. Furthermore, the softstarter has been equipped with built-in by-pass to reduce wiring and a back-lit display to provide a hassle free and easy setup and monitoring.

The complete range of softstarters

ABB's softstarter portfolio now consists of four different ranges making it possible to find a suitable softstarter for almost any possible application and motor size all the way up to 1800 A. The softstarter family consists of the compact PSR, the flexible PSS, the efficient PSE and the advanced PST(B) range.

Semiconductor fuses changed to knife type

The Bussmann semiconductor fuses, recommended to be used together with PSS, PSE and PST(B) softstarters, have been changed from screw fixing (DIN43 653) to knife fixing (DIN43 620). This will make it possible to use the standard OS type switch fuses from ABB.



www.nicsanat.com

021-87700210





News	2
Contents	3
Softstarters	4
Applications	6

PSR - The compact range

Description	8
Overview	9
Ordering details	10
Accessories	11
Technical data	12
UL ratings	13

PSS - The flexible range

Description	14
Overview	16
Ordering details	18
Accessories	22
Technical data	23
UL ratings	25

PSE - The efficient range

Description	26
Overview	28
Ordering details	30
Accessories	32
Technical data	33
UL ratings	35

PST(B) - The advanced range

Description	36
Overview	38
Ordering details	40
Accessories	44
Technical data	45
UL ratings	49

FBP FieldBusPlug

DeviceNET, MODBUS-RTU and CANopen	50
Profibus DP	52

Wall mounting instructions

Dimensions

Circuit diagrams

ProSoft (selection tool)

Coordination tables

Certifications and approvals

From the moment the first electric motor was developed, engineers have tried to come up with ways of avoiding the electrical and mechanical problems that usually occur when starting a motor. High inrush currents, current spikes and excessive mechanical wear are some of the problems that need to be avoided. One way is to use a Star-Delta starter. This method is for many applications an insufficient solution since it handles neither problems with current spikes or torque peaks nor provides a way to perform a soft stop. A softstarter on the other hand, will provide far better performance during the start and allows for soft stops of the motor.

ABB has been producing softstarters since the beginning of the 1980's. Over 30 years' experience has been incorporated into the design of today's product ranges. Modern power electronics matched with smart circuitry and software gives users of ABB's softstarters, with several state-of-the-art design features, superior control of current and voltage levels during motor start and stop.

The solution to both mechanical and electrical problems


AC motors, "the workhorses of the industry", are used to drive fans, crushers, agitators, pumps, conveyors and more. Depending on the motor installation, torque and current peaks occur. These peaks are everyday reality for production plants

all over the world, causing problems in several ways:

- Electrical problems due to voltage and current transients arising from Direct-On-Line or Star-Delta starts. The transients may overload the local supply network and cause unacceptable voltage variations that interfere with other electrical equipment connected to the network.
- Mechanical problems that address the entire drive chain, from motor to driven equipment, causing a big need for service and repair work.
- Operational problems, such as damage to products on conveyor belts.
- Water hammering and pressure surges in pipe systems when starting and stopping pumps.

The financial consequences of the problems above are considerable. Every technical problem and every breakdown costs money in repairs and lost production.

By choosing ABB's softstarter, all of these problems could be avoided. Whether the choice is the PSR, PSS, PSE or the PST(B), ABB's softstarters all allow smooth start and stops while keeping mechanical and electrical stresses to a minimum.

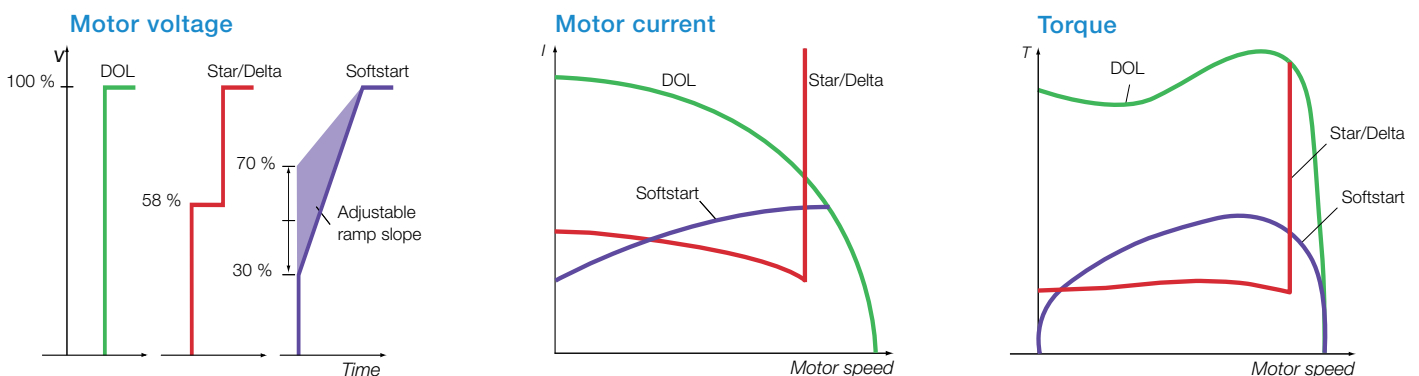

Graphs showing the basic differences between Direct-On-Line starting (DOL), Star-Delta starting and soft starting in terms of the motor voltage (V), motor current (I) and motor torque (T).

Softstarters

ABB's softstarters – The complete range

www.nicsanat.com
021-87700210



ABB offers four different ranges of softstarters to cover every customer need for solutions with motor sizes up to 1800 A. This page describes the main characteristics of the different softstarter ranges.

PSR – The compact range

The PSR softstarter is the most compact of all the softstarter ranges. A compact softstarter also allows for the design of compact starting equipment. A PSR together with a MMS (manual motor starter) makes up a far more compact starting solution than a Star-Delta starter, for instance.

By including a built-in by-pass the energy losses inside the softstarter are reduced. And with only three potentiometers, the setup of the PSR could not be easier. Still, the optimized ramping characteristics will ensure a very smooth start and stop for all applications.

PSS – The flexible range

The PSS is the most flexible of the four softstarter ranges from ABB. It allows both in-line and inside delta connections. As with the PSR, few settings are needed to get it up and running. Connecting an external current transformer makes it possible to activate the current limit function which will allow you to keep the current at a pre-set level also when starting heavy-duty applications. The PSS softstarter is the ideal solution when looking for a robust solid state starting solution where handling many starts per hour is required.

PSE – The efficient range

The PSE softstarter is the world's first compact softstarter with both built-in electronic overload for motor protection and torque control for excellent control of pumps. A compact design, packed with functionality, makes the PSE a very efficient starting solution.

An illuminated, language neutral display and a four button keypad makes it easy to take advantage of all the advanced features of the PSE softstarter. The display provides all the necessary information both during ramping and continuous operation.



PST(B) – The advanced range

The PST(B) softstarter is the most advanced softstarter in the range with almost all imaginable functionality included. Advanced protection of the motor, softstarter and load ensures a trouble-free operation. Problems are detected before the motor needs to be stopped thanks to a pre-warning system that minimizes downtime.

The torque control of the PST(B) was developed in cooperation with well-known pump manufacturers to ensure the best possible stop of pumps, without the risk of water hammering and pressure surges.


With the full-text LCD display in your own language, pre-programmed application settings and event logging, setup and operation could not be easier.

By using the ABB's FieldBusPlug, you can decide at any time which bus protocol to use. The fieldbus system will allow you to setup, control and monitor the softstarter.

PSR	PSS	PSE	PST(B)	• Standard O Optional – Not available
•	–	•	• 1)	Built-in by-pass 1) on PSTB
–	•	–	•	Inside delta connection
–	–	•	O	Coated PCBs
–	–	•	•	Display and keypad
–	–	•	•	Torque control
–	O	•	•	Settable current limit function
–	–	•	•	Electronic motor overload protection
–	–	–	•	PTC input for motor protection
–	–	–	•	Phase imbalance protection
–	–	–	•	Phase reversal protection
–	–	•	•	Locked rotor protection
–	•	•	•	Thyristor overtemperature protection
–	–	•	•	Underload protection
–	–	–	•	Programmable warning functions
–	–	•	•	Analog output
O	–	O	•	FieldBus communication
–	–	O	•	Event log
–	–	O	O	External keypad

Pumps

Water is the most important resource in the world and water facilities can be found everywhere. Examples of water applications are freshwater and wastewater systems, circulating water for heating, cooling and irrigation.

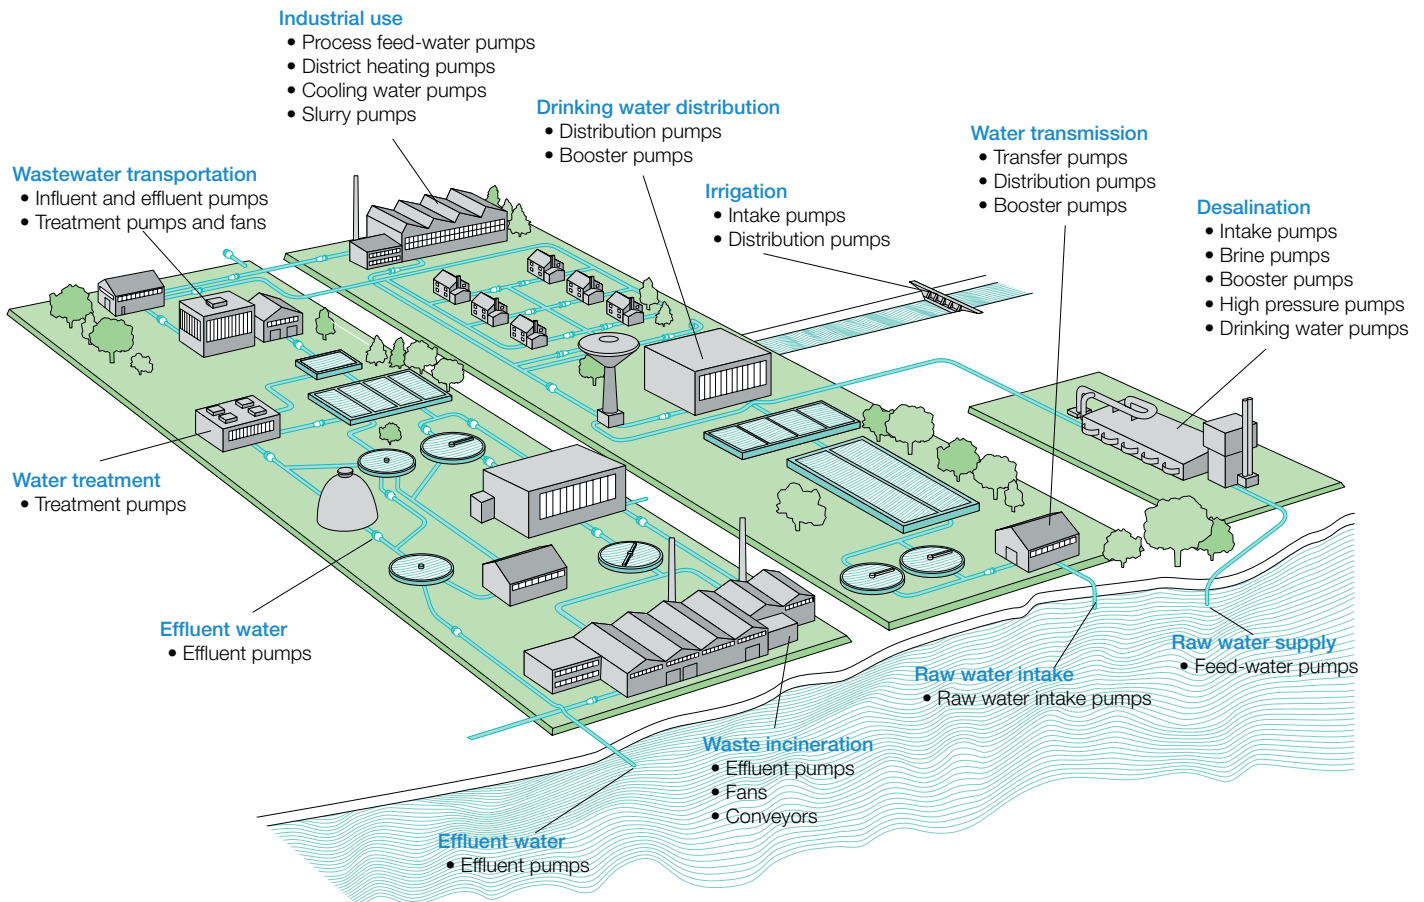

Common questions:

- How to avoid voltage drops when starting?
- ABB's softstarter will reduce the starting current and thereby avoid the voltage drops.
- How to avoid water hammering when stopping?
- Use our softstarters equipped with an optimized stop ramp. Or even better, with torque control.
- How to ensure high reliability in harsh environments?
- Use our softstarters equipped with coated circuit boards to better withstand those environments.
- How to protect my pumping equipment in the best possible way?
- Use ABB's softstarters equipped with our special designed protections such as overload, underload, and locked rotor protection.

Fans



Common questions:

- How to avoid extended voltage drops due to long starting time?
- Use ABB's softstarter equipped with current limit to keep control of the starting current.
- How to extend the life of the driving belts?
- Our softstarters will reduce the mechanical stress during start, thus avoiding slipping belts.
- How to ensure the operation of the fan?
- A softstarter with underload protection will detect broken belts, making the operator immediately aware of the problem.


Compressors



Common questions:

- How to ensure a long life of the compressor?
- Using a softstarter for starting will reduce the accelerating torque, thereby minimizing the mechanical stress.
- How to build a compact compressor unit?
- Using a compact softstarter like PSR or PSE will allow a much more compact starting equipment than for instance a Star-Delta starter.

Conveyor belts

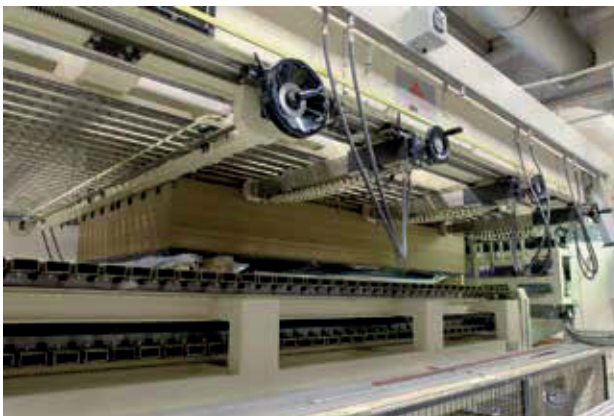

Common questions:

- How to reduce the need for service and repair of the conveyor belt?
- A softstarter from ABB will ensure starts with minimal mechanical stress on the conveyor belt.
- How to avoid that the conveyor belt is running in the wrong direction?
- Use a softstarter with phase reversal protection.
- How to improve the efficiency of the conveyor belt?
- Using softstarters with high and low current warnings allow you to load on and off the conveyor belt.
- How to ensure a successful start even after longer times without operation?
- A softstarter with kick start function will provide sufficient torque to be able to overcome the initial high friction from a temporary jammed belt.

PSR – The compact range Description

www.nicsanat.com
021-87700210



Product description

- Wide rated operational voltage 208–600 V
- Rated control supply voltage 24 V AC/DC or 100–240 V AC
- Rated operational current 3–105 A
- Wide ambient temperature range, -25 to +60 °C
- Built-in by-pass on all sizes, saving energy and reducing installation time
- Potentiometer settings
- Run signal relay on all devices
- TOR signal relay on PSR25 ... PSR105
- Optional fieldbus communication using Profibus, Modbus, Devicenet or CANopen
- DIN rail mounting on PSR3 ... PSR45
- Screw mounting on all sizes
- Connection kits for easy connection with ABB's manual motor starters
- Sophisticated algorithm eliminating the DC-component and thereby providing excellent starting performance

The PSR range is the most compact of all ABB's softstarter ranges. The compact PSR range makes it possible to fit many devices into the same enclosure. A PSR together with a MMS (manual motor starter) makes up a far more compact starting solution than a Star-Delta starter, for instance.

Flexible mounting

PSR softstarters from 3 to 45 A are possible to mount on a DIN-rail, ensuring quick and easy mounting. Naturally, all sizes can be screw mounted.

Few settings

The setup of the PSR is easily done and confirmed using the three clearly marked potentiometers on the front.

Built-in by-pass for energy saving

The built-in by-pass on all sizes does not only save energy; it will also ensure the most compact ABB's softstarter design and reduce the installation time. Thanks to the reduced heat generation, the softstarter can be mounted inside high IP class enclosures.

Suitable for stopping pumps



Even without using torque control, the PSR range is designed to reduce water hammering. Compared to the direct stops of a Star-Delta starter or a DOL starter the PSR is superior. See the stop ramp with step-down voltage below.

System concept with manual motor starters

All PSR softstarter sizes can easily be connected to the corresponding manual motor starters from ABB by using the special designed connection kits. This makes both the mounting and the connection easier and will provide a very compact starting solution containing short circuit and thermal protection, isolation function and soft starter - everything that you need.

Settings

- ① Start = 1 ... 20 sec
Stop = 0 ... 20 sec - including the step down voltage.
- ② Step down = 2% reduction for each second increased stop ramp
Stop ramp 10 sec -> step down 80% (20% reduction)
- ③ U_{ini} = 40 ... 70% results in end voltage = 30 ... 60%

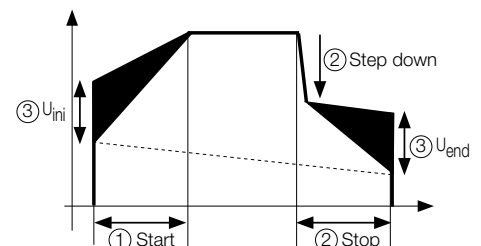

PSR – The compact range Overview

www.nicsanat.com
021-87700210



	PSR3 ... PSR16				PSR25 ... PSR30		PSR37... PSR45		PSR60 ... PSR105				
Normal start In-line connected (400 V) kW IEC, max. A (440-480 V) hp UL, max FLA	Softstarter, type												
	PSR3	PSR6	PSR9	PSR12	PSR16	PSR25	PSR30	PSR37	PSR45	PSR60	PSR72	PSR85	PSR105
	1.5	3	4	5.5	7.5	11	15	18.5	22	30	37	45	55
	3.9	6.8	9	12	16	25	30	37	45	60	72	85	105
	2	3	5	7.5	10	15	20	25	30	40	50	60	75
	3.4	6.1	9	11	15.2	24.2	28	34	46.2	59.4	68	80	104
	400 V, 40 °C												
Using manual motor starters type 1 coordination will be achieved	Manual motor starter (50 kA) type												
	MS116			MS132				MS450		MS495			—
Using gG fuses type 1 coordination will be achieved	Fuse protection (50 kA) gG Fuse												
	10 A	16 A	25 A	32 A		50 A	63 A	100 A	125 A		200 A		250 A
Suitable switch fuse for the above gG fuses	Switch fuse, type												
	OS32GD						OS125GD			OS250D			
Overload protection is used to protect the motor from over heating	Thermal overload relay												
	TF42							TF65		TF96		TF140DU	
The line contactor is not required for the softstarter itself but often used to open if OL trips	Line contactor, type												
	AF9			AF12	AF16	AF26	AF30	AF38	AF52	AF65	AF80	AF96	AF116
Using by-pass will reduce the power loss and allow more starts per hour	By-pass contacts												
	Built-in												

PSR – The compact range

Ordering details

www.nicsanat.com
021-87700210



PSR3 ... PSR105

Rated operational voltage U_e , 208-600 V AC

Rated control supply voltage, U_s , 100-240 V AC

Motor power

230 V P kW	400 V P kW	500 V P kW	IEC Max rated operational current I_e A	Type	Order code	Weight kg 1 piece
0.75	1.5	2.2	3.9	PSR3-600-70	1SFA896103R7000	0.450
1.5	3	4	6.8	PSR6-600-70	1SFA896104R7000	0.450
2.2	4	4	9	PSR9-600-70	1SFA896105R7000	0.450
3	5.5	5.5	12	PSR12-600-70	1SFA896106R7000	0.450
4	7.5	7.5	16	PSR16-600-70	1SFA896107R7000	0.450
5.5	11	15	25	PSR25-600-70	1SFA896108R7000	0.650
7.5	15	18.5	30	PSR30-600-70	1SFA896109R7000	0.650
7.5	18.5	22	37	PSR37-600-70	1SFA896110R7000	1.000
11	22	30	45	PSR45-600-70	1SFA896111R7000	1.000
15	30	37	60	PSR60-600-70	1SFA896112R7000	2.200
22	37	45	72	PSR72-600-70	1SFA896113R7000	2.270
22	45	55	85	PSR85-600-70	1SFA896114R7000	2.270
30	55	55	105	PSR105-600-70	1SFA896115R7000	2.270



PSR3 ... PSR16



PSR25 ... PSR30



PSR37 ... PSR45



PSR60 ... PSR105

Rated operational voltage U_e , 208-600 V AC

Rated control supply voltage, U_s , 24 V AC/DC


0.75	1.5	2.2	3.9	PSR3-600-11	1SFA896103R1100	0.450
1.5	3	4	6.8	PSR6-600-11	1SFA896104R1100	0.450
2.2	4	4	9	PSR9-600-11	1SFA896105R1100	0.450
3	5.5	5.5	12	PSR12-600-11	1SFA896106R1100	0.450
4	7.5	7.5	16	PSR16-600-11	1SFA896107R1100	0.450
5.5	11	15	25	PSR25-600-11	1SFA896108R1100	0.650
7.5	15	18.5	30	PSR30-600-11	1SFA896109R1100	0.650
7.5	18.5	22	37	PSR37-600-11	1SFA896110R1100	1.000
11	22	30	45	PSR45-600-11	1SFA896111R1100	1.000
15	30	37	60	PSR60-600-11	1SFA896112R1100	2.200
22	37	45	72	PSR72-600-11	1SFA896113R1100	2.270
22	45	55	85	PSR85-600-11	1SFA896114R1100	2.270
30	55	55	105	PSR105-600-11	1SFA896115R1100	2.270

PSR – The compact range Accessories

www.nicsanat.com
021-87700210



PSR16-MS116 PSR30-MS132



PSR45-MS450 PSR105-MS495



PSR-FAN3-45A PSR-FAN60-105A



PS-FBPA

Connection kit

For softstarter type	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSR3...PSR16 with MS116 or MS132	PSR16-MS116	1SFA896211R1001	1	0.022
PSR25...PSR30 with MS132-12...MS132-32	PSR30-MS132	1SFA896212R1001	1	0.040
PSR37...PSR45 with MS450	PSR45-MS450	1SFA896213R1001	1	0.034
PSR60...PSR105 with MS495	PSR105-MS495	1SAM501903R1001	1	0.050

Fan

For softstarter type	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSR3...PSR45	PSR-FAN3-45A	1SFA896311R1001	1	0.010
PSR60...PSR105	PSR-FAN60-105A	1SFA896313R1001	1	0.013

Terminal enlargements


For softstarter type	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSR60...105 Wire range mm ² 1x10...50, 2x10...25	PSLW-72	1SFA899002R1072	1	0.150

FieldBusPlug connection accessory

For softstarter type	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
The same accessory for all sizes	PS-FBPA	1SFA896312R1002	1	0.060

ABB's FieldBusPlug suitable for all sizes. See page 50-53

Connection kit

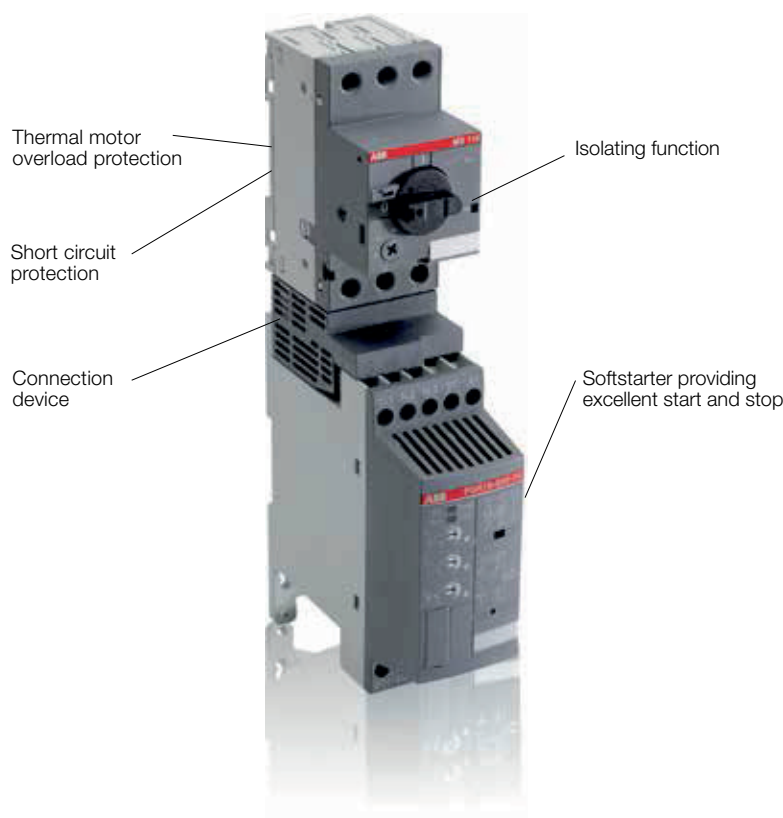

PSR – The compact range

Technical data

www.nicsanat.com
021-87700210



Rated insulation voltage U_i	600 V												
Rated operational voltage U_o	208...600 V +10%/-15%, 50/60 Hz $\pm 5\%$												
Rated control supply voltage U_c	100...240 V AC, 50/60Hz $\pm 5\%$ or 24 V AC/DC, +10%/-15%,												
Power consumption	PSR3	PSR6	PSR9	PSR12	PSR16	PSR25	PSR30	PSR37	PSR45	PSR60	PSR72	PSR85	PSR105
Supply circuit													
at 100-240 V AC	12 VA							10 VA					
at 24 V AC/DC	5 W												
Max. Power loss at rated I_o	PSR3	PSR6	PSR9	PSR12	PSR16	PSR25	PSR30	PSR37	PSR45	PSR60	PSR72	PSR85	PSR105
	0.7 W	2.9 W	6.5 W	11.5 W	20.5 W	25 W	36 W	5.5 W	8.1 W	3.6 W	5.2 W	7.2 W	6.6 W
Starting capacity at I_o	4 x I_e for 6 sec.												
Number of starts per hour	See table below for details												
standard	10 ¹⁾												
with aux. fan	20 ¹⁾												
Service factor	100%												
Ambient temperature													
during operation	-25 °C to +60 °C ²⁾												
during storage	-40 °C to +70 °C												
Maximum altitude	4000 m ³⁾												
Degree of protection	PSR3	PSR6	PSR9	PSR12	PSR16	PSR25	PSR30	PSR37	PSR45	PSR60	PSR72	PSR85	PSR105
main circuit	IP20							IP10					
control circuit	IP20												
Connectable cable area	PSR3-PSR16					PSR25-PSR30		PSR37-PSR45		PSR60-PSR105			
main circuit	1 x 0.75-2.5mm ²					1 x 2.5-10mm ²		1 x 6-35mm ²		1 x 10-95mm ²			
	2 x 0.75-2.5mm ²					2 x 2.5-10mm ²		2 x 6-16mm ²		2 x 6-35mm ²			
control circuit	PSR3-PSR16					PSR25-PSR105							
	1 x 0.75-2.5mm ²					1 x 0.75-2.5mm ²							
	2 x 0.75-2.5mm ²					2 x 0.75-1.5mm ²							
Signal relays	PSR3-PSR16					PSR25-PSR105							
for run signal													
resistive load	240 V AC, 3 A/24 V DC, 3 A					240 V AC, 3 A/24 V DC, 3 A							
AC-15 (contactor)	240 V AC, 0.5 A/24 V DC, 0.5 A					240 V AC, 0.5 A/24 V DC, 0.5 A							
for top ramp signal													
resistive load	-					240 V AC, 3 A/24 V DC, 3 A							
AC-15 (contactor)	-					240 V AC, 0.5 A/24 V DC, 0.5 A							
LED	for On/Ready	green											
	for Run/Top of ramp	green											
Settings	Ramp time during start	1-20 sec.											
	Ramp time during stop	0-20 sec.											
	Initial- and end voltage	40-70%											

¹⁾ Valid for 50% on time and 50% off time. If other data is required, contact your sales office.

²⁾ Above 40 °C up to max. 60 °C reduce the rated current with 0.8% per °C.

³⁾ When used at high altitudes above 1000 meters up to 4000 meters you need to derate the rated current using the following formula.

$$[\% \text{ of } I_o = 100 - \frac{x-1000}{150}] \quad x = \text{actual altitude for the softstarter}$$

Number of starts per hour using PSR softstarters

Motor current I_o	Starts/hour without auxiliary fan							Starts/hour with auxiliary fan													
	10	20	30	40	50	60	80	100	10	20	30	40	50	60	80	100					
3 A	PSR3							PSR6													
6 A	PSR6					PSR9					PSR6							PSR9			
9 A	PSR9			PSR12			PSR16			PSR25			PSR9				PSR12				
12 A	PSR12		PSR16		PSR25		PSR30		PSR12								PSR16		PSR25		
16 A	PSR16	PSR25			PSR30			PSR37			PSR16			PSR25			PSR30				
25 A	PSR25	PSR30	PSR37			PSR45			PSR60			PSR25			PSR30	PSR37			PSR45		
30 A	PSR30	PSR37		PSR45			PSR60			PSR72			PSR30			PSR37			PSR45		
37 A	PSR37	PSR45		PSR60			PSR72		PSR85	PSR105		PSR37			PSR45			PSR60			
45 A	PSR45		PSR60		PSR72		PSR85	PSR105	-	PSR45			PSR60			PSR72					
60 A	PSR60		PSR72	PSR85	PSR105		-	-	PSR60			PSR72		PSR85	PSR105	-					
72 A	PSR72	PSR85	PSR105		-	-	-	-	PSR72			PSR85		PSR105		-	-				
85 A	PSR85		PSR105		-	-	-	-	PSR85			PSR105		-	-	-	-				
105 A	PSR105		-	-	-	-	-	-	PSR105			-	-	-	-	-	-				

Data based on an ambient temperature of 40°, starting current of 4 x I_o and ramp time 6 seconds.

For more optimized selections, or to use PSR for heavy-duty starts, please use the softstarter selection tool.

PSR – The compact range

UL ratings

UL ratings

Type	Motor power P (hp) and full load current FLA (A)					Max. fuse A, Type
	Max FLA A	U _e 200 V/208 V hp	U _e 220 V/240 V hp	U _e 440 V/480 V hp	U _e 550 V/600 V hp	
PSR3	3.4	0.5	0.75	2	2	35 A J-Type
PSR6	6.1	1	1.5	3	5	35 A J-Type
PSR9	9	2	2	5	7.5	35 A J-Type
PSR12	11	3	3	7.5	10	35 A J-Type
PSR16	15.2	3	5	10	10	35 A J-Type
PSR25	24.2	7.5	7.5	15	20	60 A J-Type
PSR30	28	7.5	10	20	25	60 A J-Type
PSR37	34	10	10	25	30	90 A J-Type
PSR45	46.2	15	15	30	40	90 A J-Type
PSR60	59.4	20	20	40	50	110 A J-Type
PSR72	68	20	25	50	60	125 A J-Type
PSR85	80	25	30	60	75	150 A J-Type
PSR105	104	30	40	75	100	200 A J-Type



PSS – The flexible range

Description

www.nicsanat.com
021-87700210



Product description

- Rated operational voltage 208–690 V AC
- Rated control supply voltage 110–120 V AC or 220–240 V AC
- Rated operational current 18–300 A (Up to 515 A inside delta)
- Wide ambient temperature range, -25 to +60 °C
- Settings done by rotating switches
- Designed for continuous operation without by-pass
- By-pass signal relay allowing easy control of external by-pass contactor
- Fault signal relay (NO or NC)
- Current limit function as an option

The PSS is the most flexible of the four softstarter ranges from ABB. It allows both in-line and inside delta connections. It is the ideal solution when looking for a robust solid state starting solution where many starts per hour are required.

Flexible connection

The PSS softstarter can be connected both in line and inside delta. The inside delta connection makes it possible to select a smaller size softstarter matching the inside delta current. All functionality will still remain the same.

Replacement for Star-Delta starters

As the PSS can be connected inside-delta it makes for a cost-efficient replacement of an existing Star-Delta starter. You can reuse the two sets of motor cables as well as the contactors and thermal overload.

Solid state starting solution

The robust design of the PSS softstarter has no moving mechanical parts. It is dimensioned to handle many starts per hour, which can be required for, e.g., elevator applications.

Few settings

The setup of the PSS softstarter is easily done using the three rotating switches to adjust the start and stop and the dip switch to select between in-line or inside-delta connection. This will also give a quick and easy overview of the used settings.

Possible to use current limit



Using an external current transformer will make it possible to activate the current limit function. This will allow you to keep the current at a pre-set level also when starting heavy-duty applications.

PSS – The flexible range Description



www.nicsanat.com
021-87700210



The PSS softstarter can be selected according to the rated motor power in normal duty applications like pumps, compressors, elevators, escalators, short conveyor belts and bow thrusters. See page 18-19. For heavy-duty applications like centrifugal fans, crushers, mixers, mills, stirrers and long conveyor belts, select a softstarter from page 20-21.

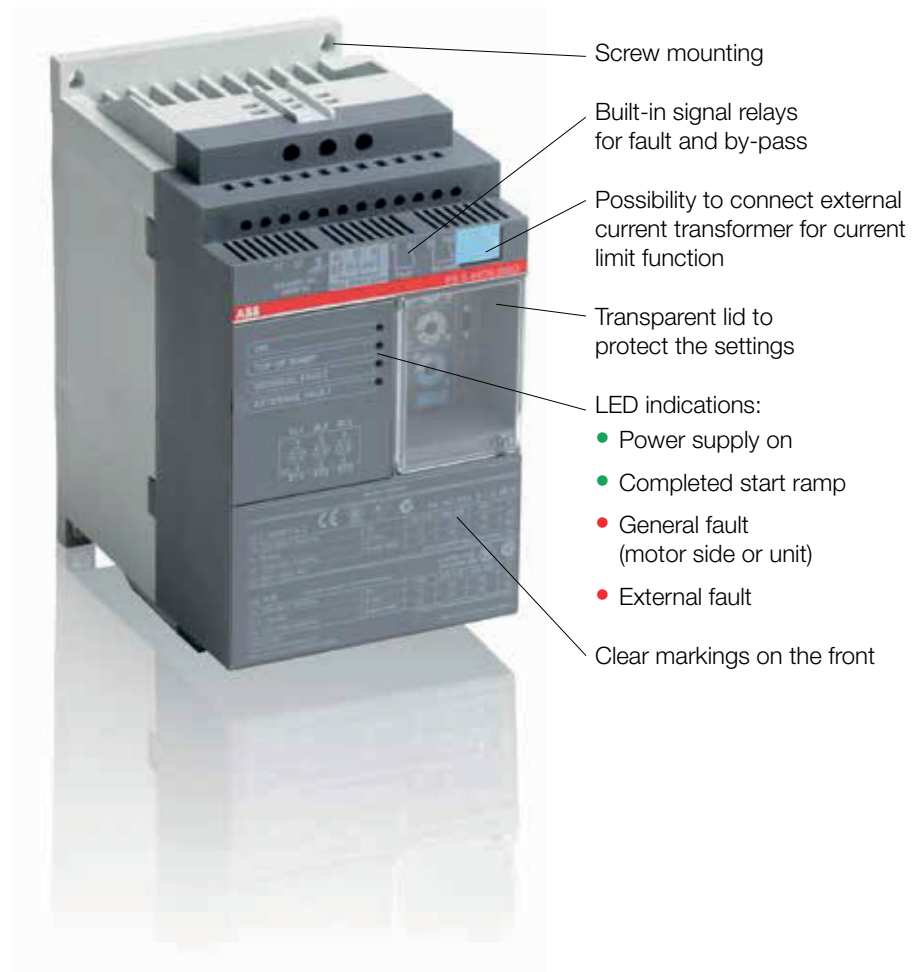

Settings

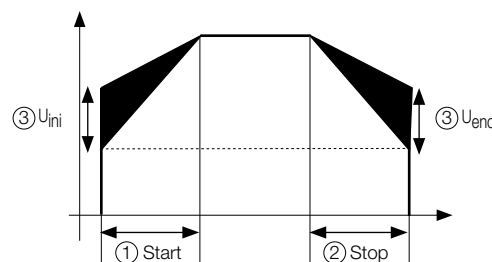

- ① Ramp time START = 1 ... 30 sec
- ② Ramp time STOP = 0 ... 30 sec
- ③ Initial voltage U_{ini} and end voltage = 30 ... 70%
Level of current limit = 1.5 ... $4xI_e$.
When current limit is used, initial voltage and end voltage is fixed at 40%
- ④ Switch for in-line or inside delta connection

PSS – The flexible range

Overview

www.nicsanat.com
021-87700210



PSS18/30...PSS44/76					PSS50/85...PSS72/124		
Normal start In-line connected (400 V) kW IEC, max. A (440-480 V) hp UL, max FLA	Softstarter, type						
	PSS18/30	PSS30/52	PSS37/64	PSS44/76	PSS50/85	PSS60/105	PSS72/124
	7.5	15	18.5	22	25	30	37
	18	30	37	44	50	60	72
	10	20	25	30	30	40	50
	18	28	34	40	47	56	67
Using MCCB type 1 coordination will be achieved	400 V, 40° C						
	MCCB (50 kA), type						
	T2S160						
To achieve type 2 coordina- tion semi-conductor fuses must be used	Fuse protection (65 kA), semi-conductor fuses, Bussmann, type						
	170M1564	170M1566	170M1568	170M1569		170M1570	170M1571
Suitable switch fuse for the recommended semi- conductor fuses	Switch fuse, type						
	OS32GD03P		OS63GD03P				OS125GD03P
Overload protection is used to protect the motor from over heating	Thermal overload relay, type						
	TF42DU			TA75DU			
The line contactor is not required for the softstarter itself but often used to open if OL trips	Line contactor, type						
	AF16	AF30	AF38	A50		A63	A75
The by-pass contactor will reduce the power loss of the softstarter. All softstar- ters can be operated without by-pass	By-pass contactor, type						
	AF9	AF16	AF26		AF30	A40	A50
Must be used if current limit function is required	Current transformers, type						
	PSCT-30 1 turn	PSCT-40 1 turn	PSCT-50 1 turn	PSCT-60 1 turn	PSCT-75 1 turn		PSCT-100 1 turn

A50 ... A300 might be replaced by AF50 ... AF300

The table above is an overview of possible combinations of devices.

Complete coordination tables are available at www.abb.com/lowvoltage

PSS – The flexible range Overview

www.nicsanat.com
021-87700210



	PSS85/147...PSS142/245			PSS175/300...PSS300/515		
Normal start In-line connected (400 V) kW IEC, max. A (440-480 V) hp UL, max FLA	Softstarter, type					
	PSS85/147	PSS105/181	PSS142/245	PSS175/300	PSS250/430	PSS300/515
	45	55	75	90	132	160
	85	105	142	175	250	300
	60	75	100	125	150	200
	85	105	125	156	225	248
Using MCCB type 1 coordination will be achieved	400 V, 40 °C					
	MCCB (50 kA), type					
	T2S160	T3S250			T4S320	T5S400
To achieve type 2 coordina- tion semi-conductor fuses must be used	Fuse protection (65 kA), semiconductor fuses, Bussmann, type					
	170M1572	170M3819	170M5809	170M5810	170M5813	170M6813
Suitable switch fuse for the recommended semi- conductor fuses	Switch fuse, type					
	OS125GD03P	OS250D03P	OS400D03P			OS630D03P
Overload protection is used to protect the motor from over heating	Thermal overload relay, type					
	TA110DU		TA200DU		TA450DU	
The line contactor is not required for the softstarter itself but often used to open if OL trips	Line contactor, type					
	A95	A110	A145	A185	A260	A300
The by-pass contactor will reduce the power loss of the softstarter. All softstar- ters can be operated without by-pass	By-pass contactor, type					
	A50	A63	A95	A145		A210
Must be used if current limit function is required	Current transformers, type					
	PSCT-125 1 turn	PSCT-150 1 turn	PSCT200 1 turn	PSCT-250 1 turn	PSCT-400 1 turn	

How to select correct size

By using the guide here, you can quickly select a suitable softstarter for the most common applications.

If a more precise selection is required, you can use the softstarter selection tool available at www.abb.com/lowvoltage

Quick guide for selection

Normal start class 10

Ordering - see page 18-19

Heavy-duty start class 30

Ordering - see page 20-21



Typical applications

- Bow thruster
- Centrifugal pump
- Centrifugal fan
- Conveyor belt (long)
- Compressor
- Conveyor belt (short)
- Crusher
- Mill
- Elevator
- Escalator
- Mixer
- Stirrer

! If more than 10 starts/h
Select one size larger than the standard selection

PSS – The flexible range

Normal starts, class 10, in-line, ordering details

www.nicsanat.com
021-87700210



PSS18/30 ... PSS300/515

Rated operational voltage, U_e , 208-500 V

Motor power

400 V P kW	500 V P kW	690 V P kW	IEC Max rated operational current I_e A	Type ^{*)}	Order code ^{**)}	Weight kg 1 piece
7.5	11	-	18	PSS18/30-500□■	1SFA892001R▽00▼	2.30
15	18.5	-	30	PSS30/52-500□■	1SFA892002R▽00▼	2.30
18.5	22	-	37	PSS37/64-500□■	1SFA892003R▽00▼	2.30
22	25	-	44	PSS44/76-500□■	1SFA892004R▽00▼	2.30
25	30	-	50	PSS50/85-500□■	1SFA892005R▽00▼	3.60
30	37	-	60	PSS60/105-500□■	1SFA892006R▽00▼	3.80
37	45	-	72	PSS72/124-500□■	1SFA892007R▽00▼	3.80
45	55	-	85	PSS85/147-500□■	1SFA892008R▽00▼	8.60
55	75	-	105	PSS105/181-500□■	1SFA892009R▽00▼	10.40
75	90	-	142	PSS142/245-500□■	1SFA892010R▽00▼	10.40
90	110	-	175	PSS175/300-500□■	1SFA892011R▽00▼	20.50
132	160	-	250	PSS250/430-500□■	1SFA892013R▽00▼	22.00
160	200	-	300	PSS300/515-500□■	1SFA892014R▽00▼	22.00



PSS18/30-500 ... 44/76-500



PSS50/85-500 ... 72/124-500
PSS18/30-690 ... 72/124-690



PSS85/147-500 ... 142/245-500
PSS85/147-690 ... 142/245-690



PSS175/300-500 ... 300/515-500
PSS175/300-690 ... 300/515-690

Rated operational voltage, U_e , 400-690 V

400 V P kW	500 V P kW	690 V P kW	IEC Max rated operational current I_e A	Type ^{*)}	Order code ^{**)}	Weight kg 1 piece
7.5	11	15	18	PSS18/30-690□■	1SFA893001R▽00▼	2.30
15	18.5	25	30	PSS30/52-690□■	1SFA893002R▽00▼	2.30
18.5	22	30	37	PSS37/64-690□■	1SFA893003R▽00▼	2.30
22	25	37	44	PSS44/76-690□■	1SFA893004R▽00▼	2.30
25	30	45	50	PSS50/85-690□■	1SFA893005R▽00▼	3.60
30	37	55	60	PSS60/105-690□■	1SFA893006R▽00▼	3.80
37	45	59	72	PSS72/124-690□■	1SFA893007R▽00▼	3.80
45	55	75	85	PSS85/147-690□■	1SFA893008R▽00▼	8.60
55	75	90	105	PSS105/181-690□■	1SFA893009R▽00▼	10.40
75	90	132	142	PSS142/245-690□■	1SFA893010R▽00▼	10.40
90	110	160	175	PSS175/300-690□■	1SFA893011R▽00▼	20.50
132	160	220	250	PSS250/430-690□■	1SFA893013R▽00▼	22.00
160	200	257	300	PSS300/515-690□■	1SFA893014R▽00▼	22.00

^{*)} Add code letter in type for:
Rated control supply voltage, U_c
□ F = 110-120 V, 50/60 Hz
L = 220-240 V, 50/60 Hz
Fault signal relay
■ no code letter = NO
C = NC

<sup>**) Add code number in order code for:
Fault signal relay
▽ 1 = NO
2 = NC
Rated control supply voltage, U_c
▼ 1 = 110-120 V, 50/60 Hz
2 = 220-240 V, 50/60 Hz</sup>

PSS – The flexible range

Normal starts, class 10, inside delta, ordering details

www.nicsanat.com
021-87700210



PSS18/30 ... PSS300/515

Rated operational voltage, U_e , 208-500 V

Motor power

400 V P_e kW	500 V P_e kW	690 V P_e kW	IEC Max rated operational current I_e A	Type ^{*)}	Order code ^{**)}	Weight kg 1 piece
15	18.5	-	30	PSS18/30-500□■	1SFA892001R▽00▼	2.30
25	30	-	52	PSS30/52-500□■	1SFA892002R▽00▼	2.30
30	37	-	64	PSS37/64-500□■	1SFA892003R▽00▼	2.30
37	45	-	76	PSS44/76-500□■	1SFA892004R▽00▼	2.30
45	55	-	85	PSS50/85-500□■	1SFA892005R▽00▼	3.60
55	75	-	105	PSS60/105-500□■	1SFA892006R▽00▼	3.80
59	80	-	124	PSS72/124-500□■	1SFA892007R▽00▼	3.80
75	90	-	147	PSS85/147-500□■	1SFA892008R▽00▼	8.60
90	110	-	181	PSS105/181-500□■	1SFA892009R▽00▼	10.40
132	160	-	245	PSS142/245-500□■	1SFA892010R▽00▼	10.40
160	200	-	300	PSS175/300-500□■	1SFA892011R▽00▼	20.50
220	295	-	430	PSS250/430-500□■	1SFA892013R▽00▼	22.00
257	355	-	515	PSS300/515-500□■	1SFA892014R▽00▼	22.00



1SFC13201F0002

PSS18/30-500 ... 44/76-500



1SFC13202F0002

PSS50/85-500 ... 72/124-500
PSS18/30-690 ... 72/124-690



1SFC13203F0002

PSS85/147-500 ... 142/245-500
PSS85/147-690 ... 142/245-690



1SFC13204F0002

PSS175/300-500 ... 300/515-500
PSS175/300-690 ... 300/515-690

Rated operational voltage, U_e , 400-690 V

15	18.5	25	30	PSS18/30-690□■	1SFA893001R▽00▼	2.30
25	30	45	52	PSS30/52-690□■	1SFA893002R▽00▼	2.30
30	37	55	64	PSS37/64-690□■	1SFA893003R▽00▼	2.30
37	45	59	76	PSS44/76-690□■	1SFA893004R▽00▼	2.30
45	55	75	85	PSS50/85-690□■	1SFA893005R▽00▼	3.60
55	75	90	105	PSS60/105-690□■	1SFA893006R▽00▼	3.80
59	80	110	124	PSS72/124-690□■	1SFA893007R▽00▼	3.80
75	90	132	147	PSS85/147-690□■	1SFA893008R▽00▼	8.60
90	110	160	181	PSS105/181-690□■	1SFA893009R▽00▼	10.40
132	160	220	245	PSS142/245-690□■	1SFA893010R▽00▼	10.40
160	200	257	300	PSS175/300-690□■	1SFA893011R▽00▼	20.50
220	295	400	430	PSS250/430-690□■	1SFA893013R▽00▼	22.00
257	355	500	515	PSS300/515-690□■	1SFA893014R▽00▼	22.00

^{*)} Add code letter in type for:
Rated control supply voltage, U_c
□ F = 110-120 V, 50/60 Hz
L = 220-240 V, 50/60 Hz
Fault signal relay
■ no code letter = NO
C = NC

^{**)} Add code number in order code for:
Fault signal relay
▽ 1 = NO
2 = NC
Rated control supply voltage, U_c
▼ 1 = 110-120 V, 50/60 Hz
2 = 220-240 V, 50/60 Hz

PSS – The flexible range

Heavy-duty starts, class 30, in-line, ordering details

PSS18/30 ... PSS300/515

Rated operational voltage U_e , 208-500 V

Motor power			IEC Max rated operational current I _e A	Type*)	Order code**)	Weight kg 1 piece
400 V P _e kW	500 V P _e kW	690 V P _e kW				
5.5	7.5	-	13	PSS18/30-500□■	1SFA892001R▽00▼	2.30
7.5	11	-	18	PSS30/52-500□■	1SFA892002R▽00▼	2.30
15	18.5	-	30	PSS37/64-500□■	1SFA892003R▽00▼	2.30
18.5	22	-	37	PSS44/76-500□■	1SFA892004R▽00▼	2.30
22	25	-	44	PSS50/85-500□■	1SFA892005R▽00▼	3.60
25	30	-	50	PSS60/105-500□■	1SFA892006R▽00▼	3.80
30	37	-	60	PSS72/124-500□■	1SFA892007R▽00▼	3.80
37	45	-	72	PSS85/147-500□■	1SFA892008R▽00▼	8.60
45	55	-	85	PSS105/181-500□■	1SFA892009R▽00▼	10.40
55	75	-	105	PSS142/245-500□■	1SFA892010R▽00▼	10.40
75	90	-	142	PSS175/300-500□■	1SFA892011R▽00▼	20.50
90	110	-	175	PSS250/430-500□■	1SFA892013R▽00▼	22.00
132	160	-	250	PSS300/515-500□■	1SFA892014R▽00▼	22.00

Rated operational voltage U_e , 400-690 V

5.5	7.5	11	13	PSS18/30-690	1SFA893001R	2.30
7.5	11	15	18	PSS30/52-690	1SFA893002R	2.30
15	18.5	25	30	PSS37/64-690	1SFA893003R	2.30
18.5	22	30	37	PSS44/76-690	1SFA893004R	2.30
22	25	37	44	PSS50/85-690	1SFA893005R	3.60
25	30	45	50	PSS60/105-690	1SFA893006R	3.80
30	37	55	60	PSS72/124-690	1SFA893007R	3.80
37	45	59	72	PSS85/147-690	1SFA893008R	8.60
45	55	75	85	PSS105/181-690	1SFA893009R	10.40
55	75	90	105	PSS142/245-690	1SFA893010R	10.40
75	90	132	142	PSS175/300-690	1SFA893011R	20.50
90	110	160	175	PSS250/430-690	1SFA893013R	22.00
132	160	220	250	PSS300/515-690	1SFA893014R	22.00

*) Add code letter in type for:
Rated control supply voltage, U_c

□ F = 110-120 V, 50/60 Hz
L = 220-240 V, 50/60 Hz

Fault signal relay

■ no code letter = NO
C = NC

**) Add code number in order code for:
Fault signal relay

▽ 1 = NO
2 = NC

Rated control supply voltage, U_c

▼ 1 = 110-120 V, 50/60 Hz
2 = 220-240 V, 50/60 Hz



PSS18/30-500 ... 44/76-500



PSS50/85-500 ... 72/124-500
PSS18/30-690 ... 72/124-690



PSS85/147-500 ... 142/245-500
PSS85/147-690 ... 142/245-690



PSS175/300-500 ... 300/515-500
PSS175/300-690 ... 300/515-690

Current transformer for current limit function

To be connected to terminals 11 and 12 on the softstarter.

The setting range (1.5 – 4) corresponds to a multiple of the transformer ratio.

Technical data below shows transformer ratio and number of turns for the primary winding.

You can also use your own current transformer with corresponding transformer ratio and with minimum 1 VA.



PSCT-30



1SFT9809-095C2



SB805-4C2


LZ...



1SFT9809-011C1



PSLW-44



LW...



LE185



LT ... -AC



LT ... -AL

For softstarter type	Transformer ratio, Number of turns	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSS18/30	30/1-1 turn	PSCT-30	1SFA899001R1030	1	0.200
PSS30/52	40/1-1 turn	PSCT-40	1SFA899001R1040	1	0.200
PSS37/64	50/1-1 turn	PSCT-50	1SFA899001R1050	1	0.200
PSS44/76	60/1-1 turn	PSCT-60	1SFA899001R1060	1	0.200
PSS50/85	75/1-1 turn	PSCT-75	1SFA899001R1075	1	0.200
PSS60/105	75/1-1 turn	PSCT-75	1SFA899001R1075	1	0.200
PSS72/124	100/1-1 turn	PSCT-100	1SFA899001R1100	1	0.150
PSS85/147	125/1-1 turn	PSCT-125	1SFA899001R1125	1	0.150
PSS105/181	150/1-1 turn	PSCT-150	1SFA899001R1150	1	0.150
PSS142/245	200/1-1 turn	PSCT-200	1SFA899001R1200	1	0.230
PSS175/300	250/1-1 turn	PSCT-250	1SFA899001R1250	1	0.230
PSS250/430	400/1-1 turn	PSCT-400	1SFA899001R1400	1	0.200
PSS300/515	400/1-1 turn	PSCT-400	1SFA899001R1400	1	0.200

Cable connectors for Cu cables

For softstarter type	Wire range mm ²	Tightening torque max. Nm	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSS85/147 ... 142/245	6-120	14	–	1SDA066917R1	3	0.113
PSS85/147 ... 142/245	2 x (50-120)	16	LZ185-2C/120	1SFN074709R1000	3	0.100
PSS175/300 ... 300/515	16-300	25	–	1SDA055016R1	3	0.133

Cable connectors for Al and Cu cables

For softstarter type	Wire range mm ²	Tightening torque max. Nm	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSS85/147 ... 142/245	95-185	31	–	1SDA054988R1	3	0.078
PSS175/300 ... 300/515	185-240	43	–	1SDA055020R1	3	0.133

Terminal enlargements

For softstarter type	Wire range mm ²	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSS18/30-500 ... 44/76-500	1x6 ... 35 2x6 ... 16	PSLW-44	1SFA899002R1044	1	0.100
PSS50/85-500 ... 72/124-500	1x10 ... 50	PSLW-72	1SFA899002R1072	1	0.150
PSS18/30-690 ... 72/124-690	2x10 ... 25				

For softstarter type	Dimensions hole ø mm ²	bar mm	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSS85/147 ... 142/245	10.5	17.5 x 5	LW185	1SFN074707R1000	1	0.250
PSS175/300 ... 300/515	10.5	20 x 5	LW300	1SFN075107R1000	1	0.450

Terminal nut washer

For softstarter type	Req. qty	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSS85/147 ... 142/245	2	LE185	1SFN074716R1000	2	0.200
PSS175/300 ... 300/515	2	LE300	1SFN075116R1000	2	0.300

Terminal shrouds

For softstarter type	Suitable for	Req. qty	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSS85/147 ... 142/245	Cable connectors	2	LT185-AC	1SFN124701R1000	2	0.050
PSS85/147 ... 142/245	Compression lugs	2	LT185-AL	1SFN124703R1000	2	0.220
PSS175/300 ... 300/515	Cable connectors	2	LT300-AC	1SFN125101R1000	2	0.070
PSS175/300 ... 300/515	Compression lugs	2	LT300-AL	1SFN125103R1000	2	0.280

PSS – The flexible range

Technical data

www.nicsanat.com
021-87700210



Rated insulation voltage U_i	690 V
Rated operational voltage U_e	208 ... 500 V AC, 400 ... 690 V AC + 10%/-15%, 50/60 Hz $\pm 5\%$
Rated control supply voltage U_s	110 ... 120 V or 220 ... 240 V +10%/-15%, 50/60 Hz $\pm 5\%$
Rated control circuit voltage U_c	Internal 24 V DC
Starting capacity at I_e	
at max. rated current, I_e	4 x I_e for 10 sec.
Number of starts per hour	30 ¹⁾
Overload capability	
overload class	10
Service factor	PSS18/30 ... 250/430 115%
	PSS300/515 110%
Ambient temperature	
during operation	-25 °C to +60 °C ²⁾
during storage	-40 °C to +70 °C
Maximum altitude	4000 m ³⁾
Degree of protection	
main circuit	PSS18/30-500 ... 44/76-500 IP20
	PSS50/85-500 ... 72/124-500 IP10
	PSS85/147-500 ... 300/515-500 IP00
	PSS18/30-690 ... 72/124-690 IP10
	PSS85/147-690 ... 300/515-690 IP00
supply and control circuit	PSS18/30 ... PSS300/515 IP20
Signal relays	
by-pass signal	Yes
fault signal	Yes (NO or NC)
rated operational voltage, U_e	250 V AC/24 V DC
rated thermal current I_e	5A
rated operational current I_e at AC-15 ($U_e=250$ V)	1.5 A
Signaling indication LED	
ready to start/On	green
completed start ramp/T.O.R	green
general fault	red
external fault	red
Settings	
ramp time during start	1-30 sec
ramp time during stop	0-30 sec
initial voltage during start	30-70%
current limit function x CT-ratio	1.5 ... 4 ⁴⁾
switch for in-line/inside delta	Yes

¹⁾ Valid for 50% on time and 50% off time. If other data is required, contact your sales office.





²⁾ Above 40 °C up to max. 60 °C reduce the rated current with 0.8% per °C.

³⁾ When used at high altitudes above 1000 meters up to 4000 meters you need to derate the rated current using the following formula.

$$[\% \text{ of } I_e = 100 - \frac{x - 1000}{150}] \quad x = \text{actual altitude for the softstarter}$$

⁴⁾ Only if current transformer is connected (accessory).

Cross section of connection cables

		Type of softstarter PSS18/30-500 ... PSS44/76-500	PSS50/85-500 ... PSS72/124-500, PSS18/30-690 ... PSS72/124-690	PSS85/147 ... PSS142/245	PSS175/300 ... PSS300/515
Main circuit					
Connection clamp					
Solid/stranded	1 x mm ²	2.5–16	6–50		See accessories
Solid/stranded	2 x mm ²	2.5–16	6–25		See accessories
Tightening torque (recommended)	Nm	2.6	4.5		See accessories
Connection bar					
Width and thickness	mm	–	–	17.5 5 ET 16540 ø 8.5	20 5 ET 16590 ø 10.2
Hole diameter	mm	–	–		
Tightening torque (recommended)	Nm	–	–	18	28
Supply and control circuit					
Connection clamp					
Solid/stranded	1 x mm ²	2.5	2.5	2.5	2.5
Solid/stranded	2 x mm ²	–	–	–	–
Tightening torque (recommended)	Nm	0.5	0.5	0.5	0.5

Fuse ratings and power losses

		Recommended ABB's overload protection		Max power loss at rated I _e		Max fuse rating - main circuit ^{1) 3)} Bussmann fuses, DIN43 620 (knife)			Power requirements of supply VA
For softstarter		Current range	without by-pass ²⁾	with external by-pass		A	Type	size	
Type	Type	A	W	W					
PSS18/30	TF42DU	7.6-18	65	13.5	50		170M1564	000	9
PSS30/52	TF42DU	7.6-30	100	14.6	80		170M1566	000	9
PSS37/64	TF42DU	7.6-37	120	17.5	125		170M1568	000	9
PSS44/76	TA75DU	18-44	142	17.5	160		170M1569	000	9
PSS50/85	TA75DU	18-50	160	20.5	160		170M1569	000	10
PSS60/105	TA75DU	18-60	190	22	200		170M1570	000	10
PSS72/124	TA75DU	18-72	226	30.5	250		170M1571	000	10
PSS85/147	TA110DU	65-85	291	56.5	315		170M1572	000	36
PSS105/181	TA110DU	65-105	351	61	400		170M3819	1*	36
PSS142/245	TA200DU	66-142	462	63	450		170M5809	2	36
PSS175/300	TA200DU	66-175	590	117	500		170M5810	2	65
PSS250/430	TA450DU	130-250	815	117	700		170M5813	2	65
PSS300/515	TA450DU	130-300	965	140	900		170M6813	3	65

¹⁾ For the supply circuit 6 A delayed, for MCB use C characteristics.

²⁾ Calculated power loss at operational current (I_{op}) without by-pass.

P_{tot} = 3 x I_{op} + VA value

Example: PSS 60/105 running at 52 A

P_{tot} = 3 x 52 + 10 = 166W

³⁾ Max fuse rating independent if in-line or inside delta connection. In inside delta connections of PSS, the fuses can be placed outside of the delta.

PSS – The flexible range

UL ratings

www.nicsanat.com
021-87700210



3-phase motor rating – in-line

Softstarters		Motor power P (hp) and full load current FLA (A)			
Type	max. FLA A	U _e 200 V/208 V hp	U _e 220 V/240 V hp	U _e 440 V/480 V hp	U _e 550 V/600 V hp
PSS18/30	18	5	5	10	15
PSS30/52	28	7.5	10	20	25
PSS37/64	34	10	10	25	30
PSS44/76	40	10	10	30	30
PSS50/85	47	15	15	30	40
PSS60/105	56	15	20	40	50
PSS72/124	67	20	20	50	60
PSS85/147	85	25	30	60	75
PSS105/181	105	30	40	75	100
PSS142/245	125	40	40	100	125
PSS175/300	156	50	60	125	150
PSS250/430	225	75	75	150	200
PSS300/515	248	75	100	200	250

3-phase motor rating – inside delta

Softstarters		Motor power P (hp) and full load current FLA (A)			
Type	Max. FLA A	U _e 200 V/208 V hp	U _e 220 V/240 V hp	U _e 440 V/480 V hp	U _e 550 V/600 V hp
PSS18/30	30	7.5	10	20	25
PSS30/52	48	15	15	30	40
PSS37/64	58	20	20	40	50
PSS44/76	69	20	25	50	60
PSS50/85	81	25	30	60	75
PSS60/105	96	30	30	75	75
PSS72/124	116	40	40	75	100
PSS85/147	147	50	50	100	150
PSS105/181	181	60	60	150	150
PSS142/245	215	75	75	150	200
PSS175/300	270	75	100	200	250
PSS250/430	389	125	150	300	400
PSS300/515	429	150	150	350	400

PSE – The efficient range

Description

www.nicsanat.com
021-87700210



Product description

- Wide rated operational voltage 208–600 V AC
- Wide rated control supply voltage 100–250 V, 50/60 Hz
- Rated operational current 18 to 370 A
- Wide ambient temperature range, -25 to +60 °C
- Coated circuit boards for reliable operation in harsh environment
- Built-in by-pass on all sizes, saving energy and reducing installation time
- User friendly HMI with illuminated language neutral display and four button keypad
- Optional external keypad, IP66
- Torque control for excellent control of pumps
- Current limit, adjustable between $1.5-7 \times I_e$
- Motor overload protection with classes 10A, 10, 20 and 30
- Motor underload protection to detect pumps running dry
- Locked rotor protection, detecting jammed pumps
- Kick start to start jammed pumps or conveyor belts
- Analog output showing operational current, 4–20 mA
- Optional fieldbus communication using Profibus, Modbus, Devicenet or CANopen
- Sophisticated algorithm eliminating the DC-component and thereby providing excellent starting performance

The PSE softstarter range is the world's first compact softstarter range with torque control. This makes the PSE range an ideal choice for pumping applications where water hammering normally is a big problem. The compactness and advanced functionality of the PSE means that it is also a very efficient solution for other applications such as compressors and fans.

Torque control

The most important function when stopping pumps is torque control. Since the PSE softstarter is optimized for controlling pumps, this feature is a must.

Built-in by-pass for energy saving

Using by-pass after reaching full voltage will greatly reduce the power loss and thereby save energy. In the PSE softstarter range, the by-pass is built-in on all sizes which will give the most compact starting solution and reduce the need for wiring during installation.

Coated circuit boards

All circuit boards in the new PSE softstarter have a protective coating to ensure a reliable operation even in tough environments like wastewater plants, where corrosive gases and acids may exist.

Motor protection

The PSE softstarter is equipped with built-in electronic overload protection, preventing the motor from overheating. Since no additional overload device is needed, our efficient design saves both space, installation time, and ultimately money.

Analog output

The analog output terminals can be connected to an analog current meter to show the current during operation. This eliminates the need of an additional current transformer. The analog output signal can also be used as an analog input to a PLC.

Display and keypad

The setup of the PSE softstarter is done using the four button keypad and the illuminated display, providing a quick and easy setup. While operating, the display will also provide important status information such as current and voltage.

External keypad

As an option the PSE softstarter can be equipped with an external keypad for easy setup and monitoring of the unit without opening the enclosure door. The keypad can also be used to copy parameters between different softstarters.

PSE – The efficient range Description

www.nicsanat.com
021-87700210



The PSE softstarter can be selected according to the rated motor power in normal duty applications like pumps, compressors, elevators, escalators, short conveyor belts and bow thrusters. See page 30.


For heavy-duty applications like centrifugal fans, crushers, mixers, mills, stirrers and long conveyor belts, select a softstarter from page 31.



- Screw mounting
- Input for reset of faults
- Analog output
- 3 output signal relays (RUN, TOR, Event)
- Built-in by-pass
- All data available on the front

Settings

- Green ready LED
 - Flashing - Supply available
 - Steady - Main available
- Green run LED
 - Flashing - Ramping up/down
 - Steady - TOR
- Yellow protection LED
- Red fault LED
- Back-lit display
- User friendly keypad
 - Similar as for PST(B)
- Four digits showing values and messages
- Icon's showing functions.
 - Language neutral

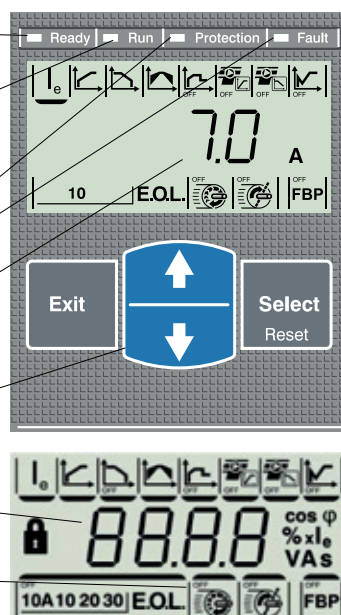

External keypad with same design as the fixed HMI

PSE – The efficient range

Overview



PSE18 ... PSE105

Normal start
In-line connected

(400 V) kW

IEC, max. A

(440-480 V) hp

UL, max FLA

Softstarter, type

PSE18	PSE25	PSE30	PSE37	PSE45	PSE60	PSE72	PSE85	PSE105
7.5	11	15	18.5	22	30	37	45	55
18	25	30	37	45	60	72	85	106
10	15	20	25	30	40	50	60	75
18	25	28	34	42	60	68	80	104

400 V, 40 °C

Using MCCB only, type 1
coordination will be achieved

MCCB (35 kA), type

T2N160

T3N250

MCCB (50 kA), type

T2S160

T3S250

To achieve type 2 coordina-
tion, semi-conductor fuses
must be used

Fuse protection (85 kA), Semiconductor fuses, Bussmann, type

170M1563	170M1564	170M1566	170M1567	170M1568	170M1569	170M1571	170M1572	170M3819
----------	----------	----------	----------	----------	----------	----------	----------	----------

Suitable switch fuse for re-
commended semi-conductor
fuses

Switch fuse, type

OS32GD03P

OS63GD03P

OS125GD03P

OS250D03P

The line contactor is not
required for the softstarter
itself but often used to open
if OL trips

Line contactor, type

AF26

AF30

AF38

AF52

AF65

AF80

AF96

AF116

Overload protection is used
to protect the motor from
over heating

Electronic overload relay, type

Built-in

The by-pass will reduce the
power loss of the softstarter.

By-pass, type

Built-in

The table above is an overview of possible combinations of devices.
Complete coordination tables are available at www.abb.com/lowvoltage

PSE – The efficient range Overview

www.nicsanat.com
021-87700210



PSE142 ... PSE170

PSE210 ... PSE370

Normal start
In-line connected

(400 V) kW
IEC, max. A
(440-480 V) hp
UL, max FLA

Softstarter, type

PSE142	PSE170	PSE210	PSE250	PSE300	PSE370
75	90	110	132	160	200
143	171	210	250	300	370
100	125	150	200	250	300
130	169	192	248	302	361

400 V, 40 °C

Using MCCB only, type 1
coordination will be achieved

MCCB (35 kA), type

T3N250	T4N320	T5N400	T5N630
--------	--------	--------	--------

MCCB (50 kA), type

T3S250	T4S320	T5S400	T5S630
--------	--------	--------	--------

To achieve type 2 coordina-
tion, semi-conductor fuses
must be used

Fuse protection (85kA), Semiconductor fuses, Bussmann, type

170M5809	170M5810	170M5812	170M5813	170M6812	170M6813
----------	----------	----------	----------	----------	----------

Suitable switch fuse for re-
commended semi-conductor
fuses

Switch fuse, type

OS400D03P	OS630D03P
-----------	-----------

The line contactor is not
required for the softstarter
itself but often used to open
if OL trips

Line contactor, type

AF140	AF190	AF205	AF265	AF305	AF370
-------	-------	-------	-------	-------	-------

Overload protection is used
to protect the motor from
over heating

Electronic overload relay, type

Built-in

The by-pass will reduce the
power loss of the softstarter.

By-pass, type

Built-in

How to select the correct size

By using the guide here, you can quickly
select a suitable softstarter for the most
common applications.

If a more precise selection is required,
you can use the softstarter selection tool
available at www.abb.com/lowvoltage

Quick guide for selection

Normal start class 10	Heavy-duty start class 30
Ordering - see page 30	Ordering - see page 31
Typical applications	
• Bow thruster • Compressor • Elevator	• Centrifugal pump • Conveyor belt (short) • Escalator
	• Centrifugal fan • Crusher • Mixer • Conveyor belt (long) • Mill • Stirrer
! If more than 10 starts/h Select <u>one</u> size larger than the standard selection	

PSE – The efficient range

Normal starts, class 10, in-line, ordering details

www.nicsanat.com
021-87700210



PSE18 ... PSE370

Rated operational voltage, U_e , 208-600 V AC

Rated control supply voltage, U_c , 100-250 V AC, 50/60 Hz

Motor power

230 V P_e kW	400 V P_e kW	500 V P_e kW	IEC Max rated operational current I_e A	Type	Order code	Weight kg 1 piece
4	7.5	11	18	PSE18-600-70	1SFA897101R7000	2.4
5.5	11	15	25	PSE25-600-70	1SFA897102R7000	2.4
7.5	15	18.5	30	PSE30-600-70	1SFA897103R7000	2.4
9	18.5	22	37	PSE37-600-70	1SFA897104R7000	2.4
11	22	30	45	PSE45-600-70	1SFA897105R7000	2.4
15	30	37	60	PSE60-600-70	1SFA897106R7000	2.4
18.5	37	45	72	PSE72-600-70	1SFA897107R7000	2.5
22	45	55	85	PSE85-600-70	1SFA897108R7000	2.5
30	55	75	106	PSE105-600-70	1SFA897109R7000	2.5
40	75	90	143	PSE142-600-70	1SFA897110R7000	4.2
45	90	110	171	PSE170-600-70	1SFA897111R7000	4.2
59	110	132	210	PSE210-600-70	1SFA897112R7000	12.4
75	132	160	250	PSE250-600-70	1SFA897113R7000	13.9
90	160	200	300	PSE300-600-70	1SFA897114R7000	13.9
110	200	250	370	PSE370-600-70	1SFA897115R7000	13.9



PSE18 ... PSE105



PSE142 ... PSE170



PSE210 ... PSE370

PSE – The efficient range

Heavy-duty starts, class 30, in-line, ordering details

www.nicsanat.com
021-87700210



PSE18 ... PSE105



PSE142 ... PSE170



PSE210 ... PSE370

PSE18 ... PSE370

Rated operational voltage, U_o , 208-600 V AC

Rated control supply voltage, U_s , 100 - 250 V AC, 50/60 Hz

Motor power

230 V P kW	400 V P kW	500 V P kW	IEC Max rated operational current I_e A	Type	Order code	Weight kg 1 piece
3	5.5	7.5	12	PSE18-600-70	1SFA897101R7000	2.4
4	7.5	11	18	PSE25-600-70	1SFA897102R7000	2.4
5.5	11	15	25	PSE30-600-70	1SFA897103R7000	2.4
7.5	15	18.5	30	PSE37-600-70	1SFA897104R7000	2.4
9	18.5	22	37	PSE45-600-70	1SFA897105R7000	2.4
11	22	30	45	PSE60-600-70	1SFA897106R7000	2.4
15	30	37	60	PSE72-600-70	1SFA897107R7000	2.5
18.5	37	45	72	PSE85-600-70	1SFA897108R7000	2.5
22	45	55	85	PSE105-600-70	1SFA897109R7000	2.5
30	55	75	106	PSE142-600-70	1SFA897110R7000	4.2
40	75	90	143	PSE170-600-70	1SFA897111R7000	4.2
45	90	110	171	PSE210-600-70	1SFA897112R7000	12.4
59	110	132	210	PSE250-600-70	1SFA897113R7000	13.9
75	132	160	250	PSE300-600-70	1SFA897114R7000	13.9
90	160	200	300	PSE370-600-70	1SFA897115R7000	13.9



1SFT9809-095C2




SB8054C2

LZ...



1SFT9809-011C1




1SFT9800-011C3

LW...



1SFC13232-1F002

LE185



1SFT9809-019C3

LT ... -AC

LT ... -AL



1SFC13232-1F002

PSECK



1SFC13235-1F002

PSECA



1SFC132168-1F001

PS-FBPA

Cable connectors for Cu cables

For softstarter type	Wire range mm ²	Tightening torque max. Nm	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSE142 ...170	6-120	14	–	1SDA06691R1	3	0.200
PSE142 ...170	2 x (50-120)	16	LZ185-2C/120	1SFN074709R1000	3	0.100
PSE210 ... 370	16-300	25	–	1SDA055016R1	3	0.133

Cable connectors for Al and Cu cables

For softstarter type	Wire range mm ²	Tightening torque max. Nm	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSE142 ...170	95-185	31	–	1SDA054988R1	3	0.078
PSE210 ... 370	185-240	43	–	1SDA055020R1	3	0.133

Terminal enlargements

For softstarter type	Dimensions hole ø mm ²	bar mm	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSE18...105	6.5	15 x 3	LW110	1SFN074307R1000	1	0.100
PSE142...170	10.5	17.5 x 5	LW185	1SFN074707R1000	1	0.450
PSE210...370	10.5	20 x 5	LW300	1SFN075107R1000	1	1.230

Terminal nut washer

For softstarter type	Req. qty	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSE142...170	2	LE185	1SFN074716R1000	2	0.200
PSE210...370	2	LE300	1SFN075116R1000	2	0.300

Terminal shrouds

For softstarter type	Suitable for	Req. qty	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSE142 ...170	Cable connectors	2	LT185-AC	1SFN124701R1000	2	0.050
PSE142 ...170	Compression lugs	2	LT185-AL	1SFN124703R1000	2	0.220
PSE210 ...370	Cable connectors	2	LT300-AC	1SFN125101R1000	2	0.070
PSE210 ...370	Compression lugs	2	LT300-AL	1SFN125103R1000	2	0.280

External keypad including a 3m cable

For softstarter type	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSE18...370	PSECK	1SFA897100R1001	1	–

USB-cable for Service Engineer Tool

For softstarter type	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PSE18...370	PSECA	1SFA897201R1001	1	0.130

FieldBusPlug connection accessory

For softstarter type	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
The same accessory for all sizes	PS-FBPA	1SFA896312R1002	1	0.060

ABB's FieldBusPlug suitable for all sizes. See page 50-53


PSE – The efficient range

Technical data

www.nicsanat.com
021-87700210



Rated insulation voltage U_i	600 V	Analog output	
Rated operational voltage U_o	208 ... 600 V +10%/-15%	Output signal reference	4 ... 20 mA
Rated control supply voltage U_s	100 ... 250 V +10%/-15%, 50/60 Hz ± 5 %	Type of output signal	I Amp
Rated control circuit voltage U_c	Internal 24 V DC	Scaling	Fixed at $1.2 \times I_o$
Starting capacity at I_o	$4 \times I_o$ for 10 sec.	Control circuit	
Number of starts per hour	10 ¹⁾	Number of inputs	3 (start, stop, reset of faults)
Overload capability,		Signal indication LED's	
Overload class	10	On / Ready	green flashing / steady
Ambient temperature		Run / TOR	green flashing / steady
During operation	-25 ... +60 °C ²⁾	Protection	yellow
During storage	-40 ... +70 °C	Fault	red
Maximum Altitude	4000 m ³⁾	Protections	
Degree of protection		Electronic overload	Yes (Class 10A, 10, 20, 30)
Main circuit	IP00	Locked rotor protection	Yes
Supply and control circuit	IP20	Underload protection	Yes
Main circuit		Field bus connection	
Built-in by-pass	Yes	Connection for ABB FieldBusPlug	Yes (option)
Cooling system - fan cooled (thermostat controlled)	Yes	External keypad	
HMI for settings		Display LCD type	
Display	4 7-segments and icons. Illuminated	Ambient temperature	
Keypad	2 selection keys and 2 navigation keys	during operation	-25 ... +60 °C
Main settings		during storage	-40 ... +70 °C
Setting current	Size dependent	Degree of protection	IP66
Ramp time during start	1-30 sec		
Ramp time during stop	0-30 sec		
Initial/end voltage	30-70%		
Current limit	$1.5-7 \times I_o$		
Torque control for start	Yes / No		
Torque control for stop	Yes / No		
Kick start	Off, 30-100%		
Signal relays			
Number of signal relays	3		
K2	Run signal		
K3	TOR (By-pass) signal		
K1	Event signal		
Rated operational voltage U_o	250 V AC/24 V DC ⁴⁾		
Rated thermal current I_{th}	3 A		
Rated operational current I_o			
at AC-15 ($U_o = 250$ V)	1.5 A		

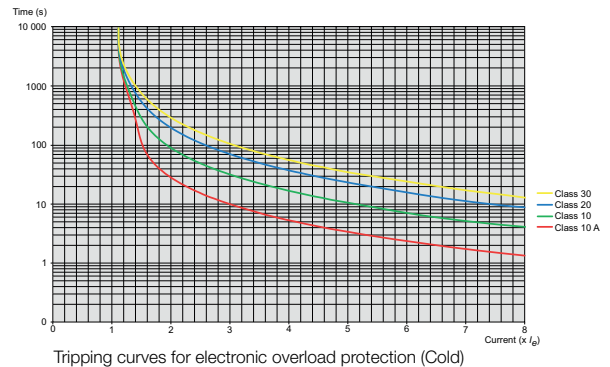

¹⁾ Valid for 50% on time and 50% off time. If other data is required, please contact your sales office

²⁾ Above 40 °C up to max. 60 °C reduce the rated current with 0.6% per °C.

³⁾ When used at high altitudes above 1000 meters up to 4000 meters you need to derate the rated current using the following formula.

[% of $I_o = 100 - \frac{x - 1000}{150}]$ x = actual altitude for the softstarter

⁴⁾ A common voltage needs to be used for all 3 signal relays





PSE – The efficient range

Technical data

www.nicsanat.com
021-87700210



Cross section of connection cables

		Type of softstarter PSE18 ... PSE105	PSE142 ... PSE170	PSE210 ... PSE370
Main circuit				
Connection clamp				
Solid/stranded	1 x mm ²	2.5–70		See accessories
Solid/stranded	2 x mm ²	2.5–70		See accessories
Tightening torque (recommended)	Nm	9		See accessories
Connection bar				
				
Width and thickness	mm			
Hole diameter	mm			
Tightening torque (recommended)	Nm	9	18	28
Supply and control circuit				
Connection clamp				
Solid/stranded	1 x mm ²	2.5	2.5	2.5
Solid/stranded	2 x mm ²	1.5	1.5	1.5
Tightening torque (recommended)	Nm	0.5	0.5	0.5

Fuse ratings and power losses

		Recommended ABB's overload protection		Max power loss at rated I _e (Internal by-pass)				Power requirements supply circuit Holding (VA) / Pull-in (VA)
For softstarter		Current range	Max fuse rating - main circuit ¹⁾					
			Bussmann fuses, DIN43 620 (Knife)					
Type	Type	A	W	A	Type	Size		
PSE								
PSE18	Integrated	5.4-18	0.2	40	170M1563	000	16/19.9	
PSE25	Integrated	7.5-25	0.4	50	170M1564	000	16/19.9	
PSE30	Integrated	9-30	0.5	80	170M1566	000	16/19.9	
PSE37	Integrated	11.1-37	0.8	100	170M1567	000	16/19.9	
PSE45	Integrated	13.5-45	1.2	125	170M1568	000	16/19.9	
PSE60	Integrated	18-60	2.2	160	170M1569	000	16/19.9	
PSE72	Integrated	21.6-72	3.1	250	170M1571	000	16/19.9	
PSE85	Integrated	25.5-85	4.3	315	170M1572	000	16/19.9	
PSE105	Integrated	31.8-106	6.6	400	170M3819	1*	16/19.9	
PSE142	Integrated	42.9-143	12.1	450	170M5809	2	16/31	
PSE170	Integrated	51.3-171	17.6	500	170M5810	2	16/31	
PSE210	Integrated	63-210	8.8	630	170M5812	2	30/700	
PSE250	Integrated	75-250	12.5	700	170M5813	2	30/700	
PSE300	Integrated	90.6-302	18	800	170M6812	3	30/700	
PSE370	Integrated	111-370	27.4	900	170M6813	3	30/700	

¹⁾ For the supply circuit 6 A delayed, for MCB use C characteristics.

PSE – The efficient range UL ratings

3-phase motor rating – in-line

Softstarters	Motor power P (hp) and full load current FLA (A)				
	Max FLA A	U _e 200 V/208 V hp	U _e 220 V/240 V hp	U _e 440 V/480 V hp	U _e 550 V/600 V hp
PSE18	18	5	5	10	15
PSE25	25	7.5	7.5	15	20
PSE30	28	7.5	10	20	25
PSE37	34	10	10	25	30
PSE45	42	10	15	30	40
PSE60	60	20	20	40	50
PSE72	68	20	25	50	60
PSE85	80	25	30	60	75
PSE105	104	30	40	75	100
PSE142	130	40	50	100	125
PSE170	169	60	60	125	150
PSE210	192	60	75	150	200
PSE250	248	75	100	200	250
PSE300	302	100	100	250	300
PSE370	361	125	150	300	350



PST(B) – The advanced range Description

www.nicsanat.com
021-87700210



Description

- Wide rated operational voltage 208–690 V AC
- Wide rated control supply voltage 100–250 V, 50/60 Hz
- Rated operational current 30 to 1050 A (Up to 1810 A inside delta)
- Both in line and inside delta connection
- Coated circuit boards available, for reliable operation even in harsh environments
- Full text display in 14 languages and 4 button keypad for easy setup and operation
- Optional external keypad, IP66
- Built-in by-pass contactor on PSTB (from 370 A) for energy saving and easy installation
- Prepared for external by-pass on PST (30–300 A)
- Torque control for excellent control of pumps
- Current limit, adjustable between $1.5-7 \times I_e$
- Fieldbus communication using Profibus, Modbus, Devicenet or CANopen
- Dual motor overload protection with classes 10A, 10, 20 and 30
- Adaptable motor underload protection to detect pumps running dry
- Adaptable locked rotor protection to detect jammed pumps
- PTC protection to protect the motor from overheating
- Adjustable kick start to start jammed pumps
- Programmable output signal relays
- Programmable pre-warning functions
- Event log with time stamp
- Analog output showing current, voltage, power factor etc. 0–10 V, 0–20 mA, 4–20 mA

The PST(B) softstarter is the most advanced softstarter in the ABB product portfolio. It is equipped with almost all imaginable features making it the ideal choice for most applications.

Torque control

ABB's torque control function is developed together with pump manufacturers to ensure the best possible pump stop, eliminating problems with water hammering and pressure surges.

By-pass for energy saving

By-passing the softstarter after reaching full voltage saves energy and reduces heat generation. The PST softstarters are equipped with extra terminals making the connection of an external by-pass contactor easier and allow all protection features to be active during by-pass. The PST(B) comes with ABB's AF contactor already built-in, ensuring a compact starting solution requiring minimal wiring.

Advanced protections

The PST(B) softstarters are equipped with almost all protections imaginable for protecting the motor, the softstarter and the application. To offer more flexibility, all protections can be tailored to your specific needs.

Flexible analog output

The analog output terminals can be connected to an analog current meter to show the current during operation. This eliminates the need of an additional current transformer. The analog output signal can also be used as an analog input to a PLC.

Fieldbus communication

ABB's FieldBusPlug supports most common fieldbus protocols. Using a PLC simplifies setup of the softstarter and gives status information in real-time as well as control of the softstarter.

Display and keypad

The PST(B) softstarter is equipped with a full text display showing all information in clear text in your own language. To make it even easier to setup, there are standard settings for many common applications, such as centrifugal pump. Selecting this will automatically provide all required settings including torque control when stopping.

External keypad


As an option, the PST(B) softstarter can be equipped with an external keypad for easy setup and monitoring of the unit without opening the enclosure door. The keypad can also be used to copy parameters between different softstarters.

PST(B) – The advanced range Description


www.nicsanat.com
021-87700210



The PST softstarter can be selected according to the rated motor power in normal duty applications like pumps, compressors, elevators, escalators, short conveyor belts and bow thrusters. See page 40–41, For heavy-duty applications like centrifugal fans, crushers, mixers, mills, stirrers and long conveyor belts, select a softstarter from page 42–43.



Settings

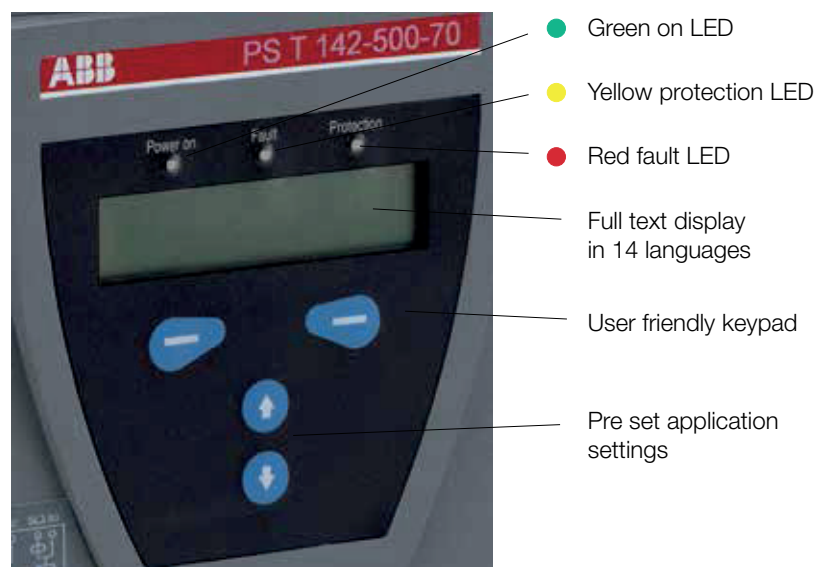

External keypad with same design as the fixed HMI

PSS – The flexible range

Heavy-duty starts, class 30, inside delta, ordering details

PSS18/30 ... PSS300/515

Rated operational voltage U_e , 208-500 V

Motor power			IEC Max rated operational current I _e A	Type*)	Order code**)	Weight kg 1 piece
400 V P kW	500 V P kW	690 V P kW				
11	15	-	22	PSS18/30-500□■	1SFA892001R▽00▼	2.30
15	18.5	-	30	PSS30/52-500□■	1SFA892002R▽00▼	2.30
25	30	-	52	PSS37/64-500□■	1SFA892003R▽00▼	2.30
30	37	-	64	PSS44/76-500□■	1SFA892004R▽00▼	2.30
37	45	-	76	PSS50/85-500□■	1SFA892005R▽00▼	3.60
45	55	-	85	PSS60/105-500□■	1SFA892006R▽00▼	3.80
55	75	-	105	PSS72/124-500□■	1SFA892007R▽00▼	3.80
59	80	-	124	PSS85/147-500□■	1SFA892008R▽00▼	8.60
75	90	-	147	PSS105/181-500□■	1SFA892009R▽00▼	10.40
90	110	-	181	PSS142/245-500□■	1SFA892010R▽00▼	10.40
132	160	-	245	PSS175/300-500□■	1SFA892011R▽00▼	20.50
160	200	-	300	PSS250/430-500□■	1SFA892013R▽00▼	22.00
220	295	-	430	PSS300/515-500□■	1SFA892014R▽00▼	22.00



PSS18/30-500 ... 44/76-500



PSS50/85-500 ... 72/124-500
PSS18/30-690 ... 72/124-690



PSS85/147-500 ... 142/245-500
PSS85/147-690 ... 142/245-690



PSS175/300-500 ... 300/515-500
PSS175/300-690 ... 300/515-690

Rated operational voltage U_e , 400-690 V

11	15	18.5	22	PSS18/30-690	1SFA893001R	2.30
15	18.5	25	30	PSS30/52-690	1SFA893002R	2.30
25	30	45	52	PSS37/64-690	1SFA893003R	2.30
30	37	55	64	PSS44/76-690	1SFA893004R	2.30
37	45	59	76	PSS50/85-690	1SFA893005R	3.60
45	55	75	85	PSS60/105-690	1SFA893006R	3.80
55	75	90	105	PSS72/124-690	1SFA893007R	3.80
59	80	110	124	PSS85/147-690	1SFA893008R	8.60
75	90	132	147	PSS105/181-690	1SFA893009R	10.40
90	110	160	181	PSS142/245-690	1SFA893010R	10.40
132	160	220	245	PSS175/300-690	1SFA893011R	20.50
160	200	257	300	PSS250/430-690	1SFA893013R	22.00
220	295	400	430	PSS300/515-690	1SFA893014R	22.00

*) Add code letter in type for:
Rated control supply voltage, U_c
□ F = 110-120 V, 50/60 Hz
L = 220-240 V, 50/60 Hz
Fault signal relay
■ no code letter = NO
C = NC

**) Add code number in order code for:
Fault signal relay
▽ 1 = NO
2 = NC
Rated control supply voltage, U_c
▽ 1 = 110-120 V, 50/60 Hz
2 = 220-240 V, 50/60 Hz

PST(B) – The advanced range Overview

www.nicsanat.com
021-87700210



PST30 ... PST72



PST85 ... PST142

Normal start
In-line connected

(400 V) kW

IEC, max. A

(440-480 V) hp

UL, max FLA

Softstarter, type

	PST30	PST37	PST44	PST50	PST60	PST72	PST85	PST105	PST142
(400 V) kW	15	18.5	22	25	30	37	45	55	75
IEC, max. A	30	37	44	50	60	72	85	105	142
(440-480 V) hp	20	25	30	40	40	50	60	75	100
UL, max FLA	28	34	42	54	60	68	80	104	130

400 V, 40 °C

Using MCCB only, type 1
coordination will be achieved.

MCCB (50 kA), type

T2S160	T3S250
--------	--------

To achieve a type 2 coordination,
semi-conductor fuses
must be used.

Fuse protection (65 kA), Semiconductor fuses, Bussmann, type

170M1566	170M1568	170M1569	170M1570	170M1571	170M1572	170M3819	170M5809
----------	----------	----------	----------	----------	----------	----------	----------

Suitable switch fuse for re-
commended semi-conductor
fuses.

Switch fuse, type

OS32GD03P	OS63GD03P	OS125GD03P	OS250D03P	OS400D03P
-----------	-----------	------------	-----------	-----------

The line contactor is not
required for the softstarter
itself but often used to
open if OL trips

Line contactor, type

AF30	AF38	AF52	AF65	AF80	AF96	AF116	AF140
------	------	------	------	------	------	-------	-------

Overload protection is used
to protect the motor from
over heating

Electronic overload relay

Built-in

The by-pass contactor will
reduce the power loss of the
softstarter. All softstarters
can be operated without
by-pass

By-pass contactor, type

AF16	AF26	AF30	AF40	AF52	AF65	AF116
------	------	------	------	------	------	-------

The table above is an overview of possible combinations of devices.
Complete coordination tables are available at www.abb.com/lowvoltage

PST(B) – The advanced range Overview

www.nicsanat.com
021-87700210



PST175 ... PST300



PSTB370 ... PSTB470



PSTB570 ... PSTB1050

Normal start
In-line connected

(400 V) kW
IEC, max. A
(440-480 V) hp
UL, max FLA

Softstarter, type

PST175	PST210	PST250	PST300	PSTB370	PSTB470	PSTB570	PSTB720	PSTB840	PSTB1050
90	110	132	160	200	250	315	400	450	560
175	210	250	300	370	470	570	720	840	1050
125	150	200	250	300	400	500	600	700	900
156	192	248	302	361	480	590	720	840	1062

400 V, 40 °C

Using MCCB only, type 1
coordination will be achieved.

MCCB (50 kA), type

T4S250	T5S400	T5S630	T6S630	T6S800	T7S1250	T7S1600
--------	--------	--------	--------	--------	---------	---------

To achieve a type 2 coordination,
semi-conductor fuses
must be used.

Fuse protection (65 kA), Semiconductor fuses, Bussmann, type

170M5810	170M5812	170M5813	170M6813	170M5813	170M6813	170M8554	170M6018	170M6020 ²⁾
----------	----------	----------	----------	----------	----------	----------	----------	------------------------

Suitable switch fuse for re-
commended semi-conductor
fuses.

Switch fuse, type

OS400D03P	OS630D03P	OS400D03P	OS630D03P	OS800D03P	1)
-----------	-----------	-----------	-----------	-----------	----

The line contactor is not
required for the softstarter
itself but often used to
open if OL trips

Line contactor, type

AF190	AF205	AF265	AF305	AF370	AF460	AF580	AF750	AF1350	AF1650
-------	-------	-------	-------	-------	-------	-------	-------	--------	--------

Overload protection is used
to protect the motor from
over heating

Electronic overload relay, type

Built-in

The by-pass contactor will
reduce the power loss of the
softstarter. All softstarters
can be operated without
by-pass

By-pass contactor, type

AF140	AF190	AF205	Built-in
-------	-------	-------	----------

1) Switch fuse not available. Use Bussmann fuse base 170H3004
2) PSTB1050-690-70 has 170M6019

How to select correct size

By using the guide here, you can quickly
select a suitable softstarter for the most
common applications.
If a more precise selection is required,
you can use the softstarter selection tool
available at www.abb.com/lowvoltage

Quick guide for selection

Normal start class 10		Heavy-duty start class 30	
Ordering - see page 40-41		Ordering - see page 42-43	
Typical applications			
• Bow thruster	• Centrifugal pump	• Centrifugal fan	• Conveyor belt (long)
• Compressor	• Conveyor belt (short)	• Crusher	• Mill
• Elevator	• Escalator	• Mixer	• Stirrer
! If more than 10 starts/h Select <u>one</u> size larger than the standard selection			

PST(B) – The advanced range

Normal starts, class 10, in-line, ordering details

www.nicsanat.com
021-87700210



PST30 ... PSTB1050

Rated operational voltage U_e , 208-600 V

Rated control supply voltage U_s , 100-250 V AC, 50/60 Hz

Motor power

400 V P_e kW	500 V P_e kW	690 V P_e kW	IEC Max rated operational current I_e A	Type ^{*)}	Order code ^{**)}	Weight kg 1 piece
15	18.5	-	30	PST30-600-70□	1SFA894002R70▽0	4.80
18.5	22	-	37	PST37-600-70□	1SFA894003R70▽0	4.80
22	25	-	44	PST44-600-70□	1SFA894004R70▽0	4.80
25	30	-	50	PST50-600-70□	1SFA894005R70▽0	4.80
30	37	-	60	PST60-600-70□	1SFA894006R70▽0	5.00
37	45	-	72	PST72-600-70□	1SFA894007R70▽0	5.00
45	55	-	85	PST85-600-70□	1SFA894008R70▽0	11.20
55	75	-	105	PST105-600-70□	1SFA894009R70▽0	13.00
75	90	-	142	PST142-600-70□	1SFA894010R70▽0	13.00
90	110	-	175	PST175-600-70□	1SFA894011R70▽0	21.50
110	132	-	210	PST210-600-70□	1SFA894012R70▽0	21.50
132	160	-	250	PST250-600-70□	1SFA894013R70▽0	23.00
160	200	-	300	PST300-600-70□	1SFA894014R70▽0	23.00
200	257	-	370	PSTB370-600-70□	1SFA894015R70▽0	31.00
250	315	-	470	PSTB470-600-70□	1SFA894016R70▽0	31.00
315	400	-	570	PSTB570-600-70□	1SFA894017R70▽0	52.00
400	500	-	720	PSTB720-600-70□	1SFA894018R70▽0	55.00
450	600	-	840	PSTB840-600-70□	1SFA894019R70▽0	60.00
560	730	-	1050	PSTB1050-600-70□	1SFA894020R70▽0	60.00

PST30 ... PSTB1050

Rated operational voltage U_e , 400-690 V

Rated control supply voltage U_s , 100-250 V AC, 50/60 Hz

15	18.5	25	30	PST30-690-70□	1SFA895002R70▽0	4.80
18.5	22	30	37	PST37-690-70□	1SFA895003R70▽0	4.80
22	25	37	44	PST44-690-70□	1SFA895004R70▽0	4.80
25	30	45	50	PST50-690-70□	1SFA895005R70▽0	4.80
30	37	55	60	PST60-690-70□	1SFA895006R70▽0	5.00
37	45	59	72	PST72-690-70□	1SFA895007R70▽0	5.00
45	55	75	85	PST85-690-70□	1SFA895008R70▽0	11.20
55	75	90	105	PST105-690-70□	1SFA895009R70▽0	13.00
75	90	132	142	PST142-690-70□	1SFA895010R70▽0	13.00
90	110	160	175	PST175-690-70□	1SFA895011R70▽0	21.50
110	132	184	210	PST210-690-70□	1SFA895012R70▽0	21.50
132	160	220	250	PST250-690-70□	1SFA895013R70▽0	23.00
160	200	257	300	PST300-690-70□	1SFA895014 R70▽0	23.00
200	257	355	370	PSTB370-690-70□	1SFA895015R70▽0	31.00
250	315	450	470	PSTB470-690-70□	1SFA895016R70▽0	31.00
315	400	560	570	PSTB570-690-70□	1SFA895017R70▽0	52.00
400	500	710	720	PSTB720-690-70□	1SFA895018R70▽0	55.00
450	600	800	840	PSTB840-690-70□	1SFA895019R70▽0	60.00
560	730	1000	1050	PSTB1050-690-70□	1SFA895020R70▽0	60.00

^{*)} Add code letter in type acc. to below:
□ No code letter = Normal
T = Coated PCBs

<sup>**) Add code number in order code acc. to below:
▽ 0 = Normal
2 = Coated PCBs</sup>



PST30 ... PST72



PST85 ... PST142



PST175 ... PST300



PSTB370 ... PSTB470



PSTB570 ... PSTB1050

PST(B) – The advanced range

Normal starts, class 10, inside delta, ordering details

www.nicsanat.com
021-87700210



PST30...PSTB1050

Rated operational voltage U_e , 208-600 V

Rated control supply voltage U_c , 100-250 V AC, 50/60 Hz

Motor power



PST30 ... PST72



PST85 ... PST142



PST175 ... PST300



PSTB370 ... PSTB470



PSTB570 ... PSTB1050

400 V P kW	500 V P kW	690 V P kW	IEC Max rated operational current I_e A	Type ^{*)}	Order code ^{**)}	Weight kg 1 piece
25	30	-	52	PST30-600-70□	1SFA894002R70▽	4.80
30	37	-	64	PST37-600-70□	1SFA894003R70▽	4.80
37	45	-	76	PST44-600-70□	1SFA894004R70▽	4.80
45	55	-	85	PST50-600-70□	1SFA894005R70▽	4.80
55	75	-	105	PST60-600-70□	1SFA894006R70▽	5.00
59	80	-	124	PST72-600-70□	1SFA894007R70▽	5.00
75	90	-	147	PST85-600-70□	1SFA894008R70▽	11.20
90	110	-	181	PST105-600-70□	1SFA894009R70▽	13.00
132	160	-	245	PST142-600-70□	1SFA894010R70▽	13.00
160	200	-	300	PST175-600-70□	1SFA894011R70▽	21.50
184	250	-	360	PST210-600-70□	1SFA894012R70▽	21.50
220	295	-	430	PST250-600-70□	1SFA894013R70▽	23.00
257	355	-	515	PST300-600-70□	1SFA894014R70▽	23.00
355	450	-	640	PSTB370-600-70□	1SFA894015R70▽	31.00
450	600	-	814	PSTB470-600-70□	1SFA894016R70▽	31.00
540	700	-	987	PSTB570-600-70□	1SFA894017R70▽	52.00
710	880	-	1247	PSTB720-600-70□	1SFA894018R70▽	55.00
800	1000	-	1455	PSTB840-600-70□	1SFA894019R70▽	60.00
1000	1250	-	1810	PSTB1050-600-70□	1SFA894020R70▽	60.00

PST30 ... PSTB1050

Rated operational voltage U_e , 400-690 V

Rated control supply voltage U_c , 100-250 V AC, 50/60 Hz

25	30	45	52	PST30-690-70□	1SFA895002R70▽	4.80
30	37	55	64	PST37-690-70□	1SFA895003R70▽	4.80
37	45	59	76	PST44-690-70□	1SFA895004R70▽	4.80
45	55	75	85	PST50-690-70□	1SFA895005R70▽	4.80
55	75	90	105	PST60-690-70□	1SFA895006R70▽	5.00
59	80	110	124	PST72-690-70□	1SFA895007R70▽	5.00
75	90	132	147	PST85-690-70□	1SFA895008R70▽	11.20
90	110	160	181	PST105-690-70□	1SFA895009R70▽	13.00
132	160	220	245	PST142-690-70□	1SFA895010R70▽	13.00
160	200	257	300	PST175-690-70□	1SFA895011R70▽	21.50
184	250	315	360	PST210-690-70□	1SFA895012R70▽	21.50
220	295	400	430	PST250-690-70□	1SFA895013R70▽	23.00
257	355	500	515	PST300-690-70□	1SFA895014R70▽	23.00
355	450	600	640	PSTB370-690-70□	1SFA895015R70▽	31.00
450	600	800	814	PSTB470-690-70□	1SFA895016R70▽	31.00
540	700	960	987	PSTB570-690-70□	1SFA895017R70▽	52.00
710	880	1200	1247	PSTB720-690-70□	1SFA895018R70▽	55.00
800	1000	1400	1455	PSTB840-690-70□	1SFA895019R70▽	60.00
1000	1250	1700	1810	PSTB1050-690-70□	1SFA895020R70▽	60.00

^{*)} Add code letter in type acc. to below:
□ No code letter = Normal
T = Coated PCBs

^{**)} Add code number in order code acc. to below:
▽ 0 = Normal
2 = Coated PCBs

PST(B) – The advanced range

Heavy-duty, class 30, in-line, ordering details

PST30...PSTB1050

Rated operational voltage U_e , 208-600 V

Rated control supply voltage U_c , 100-250 V AC, 50/60 Hz

Motor power

400 V P kW	500 V P kW	690 V P kW	IEC Max rated operational current I_e A	Type*)	Order code**)	Weight kg 1 piece
11	15	-	22	PST30-600-70□	1SFA894002R70V0	4.80
15	18.5	-	30	PST37-600-70□	1SFA894003R70V0	4.80
18.5	22	-	37	PST44-600-70□	1SFA894004R70V0	4.80
22	25	-	44	PST50-600-70□	1SFA894005R70V0	4.80
25	30	-	50	PST60-600-70□	1SFA894006R70V0	5.00
30	37	-	60	PST72-600-70□	1SFA894007R70V0	5.00
37	45	-	72	PST85-600-70□	1SFA894008R70V0	11.20
45	55	-	85	PST105-600-70□	1SFA894009R70V0	13.00
55	75	-	105	PST142-600-70□	1SFA894010R70V0	13.00
75	90	-	142	PST175-600-70□	1SFA894011R70V0	21.50
90	110	-	175	PST210-600-70□	1SFA894012R70V0	21.50
110	132	-	210	PST250-600-70□	1SFA894013R70V0	23.00
132	160	-	250	PST300-600-70□	1SFA894014R70V0	23.00
160	200	-	300	PSTB370-600-70□	1SFA894015R70V0	31.00
200	257	-	370	PSTB470-600-70□	1SFA894016R70V0	31.00
250	315	-	470	PSTB570-600-70□	1SFA894017R70V0	52.00
315	400	-	570	PSTB720-600-70□	1SFA894018R70V0	55.00
400	500	-	720	PSTB840-600-70□	1SFA894019R70V0	60.00
450	600	-	840	PSTB1050-600-70□	1SFA894020R70V0	60.00

PST30...PSTB1050

Rated operational voltage U_e , 400-690 V

Rated control supply voltage U_c , 100-250 V AC, 50/60 Hz

11	15	18.5	22	PST30-690-70□	1SFA895002R70V0	4.80
15	18.5	25	30	PST37-690-70□	1SFA895003R70V0	4.80
18.5	22	30	37	PST44-690-70□	1SFA895004R70V0	4.80
22	25	37	44	PST50-690-70□	1SFA895005R70V0	4.80
25	30	45	50	PST60-690-70□	1SFA895006R70V0	5.00
30	37	55	60	PST72-690-70□	1SFA895007R70V0	5.00
37	45	59	72	PST85-690-70□	1SFA895008R70V0	11.20
45	55	75	85	PST105-690-70□	1SFA895009R70V0	13.00
55	75	90	105	PST142-690-70□	1SFA895010R70V0	13.00
75	90	132	142	PST175-690-70□	1SFA895011R70V0	21.50
90	110	160	175	PST210-690-70□	1SFA895012R70V0	21.50
110	132	184	210	PST250-690-70□	1SFA895013R70V0	23.00
132	160	220	250	PST300-690-70□	1SFA895014R70V0	23.00
160	200	257	300	PSTB370-690-70□	1SFA895015R70V0	31.00
200	257	355	370	PSTB470-690-70□	1SFA895016R70V0	31.00
250	315	450	470	PSTB570-690-70□	1SFA895017R70V0	52.00
315	400	560	570	PSTB720-690-70□	1SFA895018R70V0	55.00
400	500	710	720	PSTB840-690-70□	1SFA895019R70V0	60.00
450	600	800	840	PSTB1050-690-70□	1SFA895020R70V0	60.00

*) Add code letter in type acc. to below:
□ No code letter = Normal
T = Coated PCBs

**) Add code number in order code acc. to below:
▽ 0 = Normal
2 = Coated PCBs



PST30 ... PST72



PST85 ... PST142



PST175 ... PST300



PSTB370 ... PSTB470



PSTB570 ... PSTB1050

PST(B) – The advanced range Heavy-duty, class 30, inside delta, ordering details

PST30...PSTB1050

Rated operational voltage U_e , 208-600 V

Rated control supply voltage U_s , 100-250 V AC, 50/60 Hz

Motor power

400 V P_e kW	500 V P_e kW	690 V P_e kW	IEC Max rated operational current I_o A	Type ^{*)}	Order code ^{**)}	Weight kg 1 piece
18.5	25	-	42	PST30-600-70□	1SFA894002R70▽0	4.80
25	30	-	52	PST37-600-70□	1SFA894003R70▽0	4.80
30	37	-	64	PST44-600-70□	1SFA894004R70▽0	4.80
37	45	-	76	PST50-600-70□	1SFA894005R70▽0	4.80
45	55	-	85	PST60-600-70□	1SFA894006R70▽0	5.00
55	75	-	105	PST72-600-70□	1SFA894007R70▽0	5.00
59	80	-	124	PST85-600-70□	1SFA894008R70▽0	11.20
75	90	-	147	PST105-600-70□	1SFA894009R70▽0	13.00
90	110	-	181	PST142-600-70□	1SFA894010R70▽0	13.00
132	160	-	245	PST175-600-70□	1SFA894011R70▽0	21.50
160	200	-	300	PST210-600-70□	1SFA894012R70▽0	21.50
184	250	-	360	PST250-600-70□	1SFA894013R70▽0	23.00
220	295	-	430	PST300-600-70□	1SFA894014R70▽0	23.00
257	355	-	515	PSTB370-600-70□	1SFA894015R70▽0	31.00
355	450	-	640	PSTB470-600-70□	1SFA894016R70▽0	31.00
450	600	-	814	PSTB570-600-70□	1SFA894017R70▽0	52.00
540	700	-	987	PSTB720-600-70□	1SFA894018R70▽0	55.00
710	880	-	1247	PSTB840-600-70□	1SFA894019R70▽0	60.00
800	1000	-	1455	PSTB1050-600-70□	1SFA894020R70▽0	60.00

PST30...PSTB1050

Rated operational voltage, U_e , 400-690 V

Rated control supply voltage U_s , 100-250 V AC, 50/60 Hz

18.5	25	37	42	PST30-690-70□	1SFA895002R70▽0	4.80
25	30	45	52	PST37-690-70□	1SFA895003R70▽0	4.80
30	37	55	64	PST44-690-70□	1SFA895004R70▽0	4.80
37	45	59	76	PST50-690-70□	1SFA895005R70▽0	4.80
45	55	75	85	PST60-690-70□	1SFA895006R70▽0	5.00
55	75	90	105	PST72-690-70□	1SFA895007R70▽0	5.00
59	80	110	124	PST85-690-70□	1SFA895008R70▽0	11.20
75	90	132	147	PST105-690-70□	1SFA895009R70▽0	13.00
90	110	160	181	PST142-690-70□	1SFA895010R70▽0	13.00
132	160	220	245	PST175-690-70□	1SFA895011R70▽0	21.50
160	200	257	300	PST210-690-70□	1SFA895012R70▽0	21.50
184	250	315	360	PST250-690-70□	1SFA895013R70▽0	23.00
220	295	400	430	PST300-690-70□	1SFA895014R70▽0	23.00
257	355	500	515	PSTB370-690-70□	1SFA895015R70▽0	31.00
355	450	600	640	PSTB470-690-70□	1SFA895016R70▽0	31.00
450	600	800	814	PSTB570-690-70□	1SFA895017R70▽0	52.00
540	700	960	987	PSTB720-690-70□	1SFA895018R70▽0	55.00
710	880	1200	1247	PSTB840-690-70□	1SFA895019R70▽0	60.00
800	1000	1400	1455	PSTB1050-690-70□	1SFA895020R70▽0	60.00

^{*)} Add code letter in type acc. to below:

□ No code letter = Normal
T = Coated PCBs

^{**)} Add code number in order code acc. to below:

▽ 0 = Normal
2 = Coated PCBs

PST30 ... PST72

PST85 ... PST142

PST175 ... PST300

PSTB370 ... PSTB470

PSTB570 ... PSTB1050

PST(B) – The advanced range Accessories

www.nicsanat.com
021-87700210



1SFT98099-095C2



SB8054C2

LZ...




1SFT98099-011C1



1SFT98000-012C3

LX...



1SFT98000-011C3

LW...




1SFC13232F0002

LE185



1SFC13232F0002

LE460



1SFT98099-019C3

1SFT98099-125

LT ... -AC

LT ... -AL



1SFC132113F0002

PSTEK



1SFC132189F0002

PSTM-2

Cable connectors for Cu cables

For PST85...300 you need 9 pieces if also using the terminals B1, B2, B3 for external by-pass contactor.

For softstarter type	Wire range mm ²	Tightening torque max. Nm	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PST85 ...142	6-120	14	-	1SDA066917R1	3	0.113
PST85 ...142	2x(50-120)	16	LZ185-2C/120	1SFN074709R1000	3	0.100
PST175 ...PST300	16-300	25	-	1SDA055016R1	3	0.133

Cable connectors for Al and Cu cables

For PST85...300 you need 9 pieces if also using the terminals B1, B2, B3 for external by-pass contactor.

For softstarter type	Wire range mm ²	Tightening torque max. Nm	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PST85 ...142	95-185	31	-	1SDA054988R1	3	0.078
PST175 ...300	185-240	43	-	1SDA055020R1	3	0.133
PSTB370 ...470	2x(120-240)	35	-	1SDA013922R1	3	0.225
PSTB570 ...1050	3x(70-185)	45	-	1SDA013956R1	3	0.700

Terminal extensions

For softstarter type	Dimensions hole ø mm ²	bar mm	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PST85...142	8.5	17.5x5	LX185 ¹⁾	1SFN074710R1000	1	0.250
PST175...300	10.5	20x5	LX300 ²⁾	1SFN075110R1000	1	0.350
PSTB370...470	10.5	25x5	LX460	1SFN075710R1000	1	0.500
PSTB570...1050	13	40x6	LX750	1SFN076110R1000	1	0.850

Terminal enlargements

For softstarter type	Dimensions hole ø mm ²	bar mm	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PST30...72	6.5	15x3	LW110 ¹⁾	1SFN074307R1000	1	0.100
PST85...142	10.5	17.5x5	LW185 ¹⁾	1SFN074707R1000	1	0.250
PST175...300	10.5	20x5	LW300 ¹⁾	1SFN075107R1000	1	0.450
PSTB370...470	10.5	25x5	LW460	1SFN075707R1000	1	0.730
PSTB570...1050	13	40x6	LW750	1SFN076107R1000	1	1.230

Terminal nut washer

For softstarter type	Req. qty	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PST85...142	1	LE185 ¹⁾	1SFN074716R1000	2	0.200
PST175...300	3	LE300 ²⁾	1SFN075116R1000	2	0.300
PSTB370...470	6	LE460	1SFN075716R1000	6	0.600
PSTB570...1050	6	LE750	1SFN076116R1000	6	0.750

Terminal shrouds

For softstarter type	Suitable for	Req. qty	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PST85...142	Cable connectors	1 pce and 1 pce	LT185-AC LT460-AC	1SFN124701R1000 1SFN125701R1000	2	0.050
PST85...142	Compression lugs	1 pce and 1 pce	LT185-AL LT460-AL	1SFN124703R1000 1SFN125703R1000	2	0.220
PST175...300	Cable connectors	3 pcs	LT300-AC ²⁾	1SFN125101R1000	2	0.070
PST175...300	Compression lugs	3 pcs	LT300-AL ²⁾	1SFN125103R1000	2	0.280
PSTB370...470	Cable connectors	2 pcs	LT460-AC	1SFN125701R1000	2	0.100
PSTB370...470	Compression lugs	2 pcs	LT460-AL	1SFN125703R1000	2	0.800
PSTB570...1050	Cable connectors	2 pcs	LT750-AC	1SFN126101R1000	2	0.120
PSTB570...1050	Compression lugs	2 pcs	LT750-AL	1SFN126103R1000	2	0.825

External keypad including a 3 m cable

For softstarter type	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PST30...300	PSTEK	1SFA899003R1000	1	0.400
PSTB370...1050				

Marine kit

For softstarter type	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
PST85...142	PSTM-2	1SFA899004R1000	1	0.240

FieldBusPlug

ABB's FiledBusPlug suitable for all sizes. See page 50-53

¹⁾ Only fits on the motor side

²⁾ Use two sets of the accessories on the line side and one set on the motor side.

PST(B) – The advanced range

Technical data

www.nicsanat.com
021-87700210



Rated insulation voltage U_i	690 V		Control circuit	
Rated operational voltage U_e	208...600 V, 400...690 V + 10%/-15% 50/60 Hz $\pm 5\%$		Number of inputs	2 (start, stop)
Rated control supply voltage U_s	100...250 V +10%/-15% 50/60 Hz $\pm 5\%$		Number of additional programmable inputs	2 (Each input can be programmed to be either: Non, Reset, Enable, Jog, DOL-On, Start motor 2, Start motor 3 or FB-Dis)
Rated control circuit voltage U_c	Internal or external 24 V DC			
Starting capacity at I_e	4 x I_e for 10 sec.			
Number of starts per hour	PST30...300 30 ¹⁾	PSTB370...1050 10 ¹⁾		
Overload capability			Signalling indication LED	
Overload class	10		Power on	green
Service factor	PST(B)30...840 115%	PSTB1050 100 %	Fault	red
			Protection	yellow
Ambient temperature			Protections	
during operation	$\pm 0 \dots +50 \text{ }^\circ\text{C}$ ²⁾		Electronic overload	Yes (Class 10A, 10, 20, 30)
during storage	$-25 \dots +70 \text{ }^\circ\text{C}$		Dual overload	Yes (separate overload function for start and run)
Maximum altitude	4000 m ³⁾		PTC connection	Yes
Degree of protection	PST30...72 IP10	PST85...PSTB1050 IP00	Locked rotor protection	Yes (Level and delay adjustable)
main circuit			Underload protection	Yes (Level and delay adjustable)
Supply and control circuit	IP20		Phase imbalance	Yes (Level and delay adjustable)
Main circuit	PST30...300 Built-in by-pass contactor Cooling system - Fan cooled	PSTB370...1050 Yes Yes (thermostat controlled)	High current ($8 \times I_e$)	Yes
HMI for settings (Human Machine Interface)			Phase reversal protection	Yes
Display	Full text		Warnings (pre-warning)	
Languages	English, German, Italian, Dutch, Chinese, Finnish, Swedish, French, Spanish, Russian, Portuguese, Turkish, Polish and Czech		High current	Yes (Level and delay adjustable)
Keypad	2 selection keys and 2 navigating keys		Low current (underload)	Yes (Level and delay adjustable)
Signal relays			Overload trip	Yes (Level and delay adjustable)
Number of programmable signal relays	3 (each relay can be programmed to be Run, By-pass or Event signal)		Overtemp, thyristor (SCR)	Yes
K4	Default as Run signal		Start of several motors	Yes (Different parameter sets)
K5	Default as TOR (By-pass) signal		Field bus connection	
K6	Default as Event signal		Connection for ABB FiledBus Plug	Yes
Rated operational voltage, U_e	250 V AC/24 V DC		PTC input	
Rated thermal current I_{th}	5 A		Switch off resistance	2825 ohm $\pm 20\%$
Rated operational current I_e at AC-15 ($U_e=250 \text{ V}$)	1.5 A		Switch on resistance	1200 ohm $\pm 20\%$
Analog output			External keypad	
Output signal reference	0 ... 10 V, 0 ... 20 mA, 4 ... 20 mA		Display	LCD type
Type of output signal	I Amp, U Volt, P kW, P hp, Q kVAR, S kVA, TmpMot, TmpSCR, cosPhi		Ambient temperature	
			During operation	$\pm 0 \dots +50 \text{ }^\circ\text{C}$
			During storage	$-25 \dots +70 \text{ }^\circ\text{C}$
			Degree of protection	IP66

¹⁾ Valid for 50% on time and 50% off time. If other data is required, contact your sales office.

²⁾ Above 40 °C up to max. 50 °C reduce the rated current with 0.8% per °C.

³⁾ When used at high altitudes above 1000 meters up to 4000 meters you need to derate the rated current using the following formula.

$$\left[\% \text{ of } I_e = 100 - \frac{x-1000}{150} \right] \quad x = \text{actual altitude for the softstarter}$$

PSTB Integrated by-pass ratings

Softstarter	PSTB370	PSTB470	PSTB570	PSTB720	PSTB840	PSTB1050
Integrated contactor	AF305		AF460	AF580	AF750	
AC-3 rating (A)	305		460	580	750	

PST(B) – The advanced range

Technical data

www.nicsanat.com
021-87700210



Major possible settings and the displayed text and the set default values

Description	Text on display (Eng)	Values on display	Default value
Setting current for overload, locked rotor etc.	Setting I _l	9.0 ... 1207 A divided into 19 overlapping ranges.	See table, page 48
Time for start ramp	Start Ramp	1 ... 30 s, 1 ... 120 s (Range depends on Start Range)	10 s
Time for stop ramp	Stop Ramp	0 ... 30 s, 0 ... 120 s (Range depends on Stop Range)	0 s
Initial voltage for start ramp	Init Volt	30 ... 70%	30%
End voltage for stop ramp	End Volt	30 ... 70%	30%
Step down voltage	Step Down	30 ... 100%	100%
Level of the current limit.	Current Lim	1.5 ... 7.0 x I _l	4.0 x I _l
Selection of kick start	Kick Start	Yes, No	No
Level of kick start if selected	Kick Level	50 ... 100%	50 %
Time for kick start if selected	Kick Time	0.1 ... 1.5 s	0.2
Selectable range for start ramp	Start Range	1 ... 30 s, 1 ... 120 s	1 ... 30 s
Selectable range for stop ramp	Stop Range	0 ... 30 s, 0 ... 120 s	0 ... 30 s
Overload protection	Overload	No, Normal, Dual	Normal
Overload class	OL Class	10 A, 10, 20, 30	10
Overload class, dual type, start class	OL Class S	10A, 10, 20, 30	10
Overload class, dual type, run class	OL Class R	10A, 10, 20, 30	10
Type of operation for overload protection	OL Op	Stop-M, Stop-A, Ind	Stop-M
Locked rotor protection	Locked Rotor	Yes, No	No
Trip level for locked rotor protection	Lock R Lev	0.5 ... 8.0 x I _l	4.0 x I _l
Trip time for locked rotor protection	Lock R Time	0.2 ... 10 s	1.0 s
Type of operation for locked rotor protection	Lock R Op	Stop-M, Stop-A, Ind	Stop-M
Underload protection	Underload	Yes, No	No
Trip level for underload protection	Underl Lev	0.4 ... 0.8 x I _l	0.5 x I _l
Trip time for underload protection	Underl Time	1 ... 30 s	10 s
Type of operation for underload protection	Underl Op	Stop-M, Stop-A, Ind	Stop-M
Phase imbalance protection	Phase Imb	Yes, No	No
Trip level for phase imbalance protection	Ph Imb Lev	10 ... 80%	80%
Type of operation for phase imbalance protection	Ph Imb Op	Stop-M, Stop-A, Ind	Stop-M
High current protection	High I	Yes, No	No
Type of operation for high current protection	High I Op	Stop-M, Stop-A, Ind	Stop-M
Phase reversal protection	Phase Rev	Yes, No	No
Type of operation for phase reversal protection	Ph Rev Op	Stop-M, Stop-A, Ind	Stop-M
PTC protection	PTC	Yes, No	No
Type of operation for PTC protection	PTC Op	Stop-M, Stop-A	Stop-M
An external bypass contactor is used	Ext ByPass	Yes, No	No
High current warning	Warn I=High	Yes, No	No
Trip level for high current warning	Wa I=H Lev	0.5 ... 5.0 x I _l	1.2 x I _l
Low current warning	Warn I=Low	Yes, No	No
Trip level for low current warning	Wa I=L Lev	0.4 ... 1.0 x I _l	0.8 x I _l
Overload warning	Warn OL	Yes, No	No
Trip level for overload warning	Wa OL Lev	40 ... 99%	90%
Thyristor overload warning	Warn SCR OL	Yes, No	No
Type of operation for phase loss fault	Ph Loss Op	Stop-M, Stop-A	Stop-M
Type of operation for by-pass doesn't close	BP open Op	Stop-M, Stop-A	Stop-M
Type of operation for by-pass doesn't open	BP closed Op	Stop-M, Stop-A	Stop-M
Type of operation for fieldbus fault	FB Fault Op	Stop-M, Stop-A	Stop-M
Type of operation for frequency fault	Freq F Op	Stop-M, Stop-A	Stop-M
Type of operation for heat sink over temperature fault	HS Temp Op	Stop-M, Stop-A	Stop-M
Type of operation for thyristor short circuit fault	SCR SC Op	Stop-M, Stop-A	Stop-M
Function of programmable input In_0	In0	None, Reset, Enable, Jog, DOL, Start 2, FB-Dis	Reset
Function of programmable input In_1	In1	None, Reset, Enable, Jog, DOL, Start 3, FB-Dis	Reset
Function of programmable relay output K4	Relay K4	Run, TOR, Event	Run
Function of programmable relay output K5	Relay K5	Run, TOR, Event	TOR
Function of programmable relay output K6	Relay K6	Run, TOR, Event	Event
Control of the softstarter with fieldbus	Fieldb Ctrl	Yes, No	No
Number of sequences for sequence start.	No of Seq	No, 2, 3	No
Language to use on display	Language	US/UK, FI, SE, PT, NL, IT, FR, ES, DE, CN, RU, TR, PL, CZ	US/UK
Password for display	Password	No, 1 ... 255	
Start mode	Start Mode	Volt, Torque	Volt
Stop mode	Stop Mode	Volt, Torque	Volt
Torque limit	Torque limit	20 ... 200%	150%
Analog output	Analogue Out	Yes, No	No
Analog output, reference	Anl Ref	0 ... 10 V, 0 ... 20 mA, 4 ... 20 mA	4 ... 20 mA
Analog output, type of value	Anl Type	I Amp, U Volt, P kW, P hp, Q kVAR, S kVA, TmpMot, TmpSCR, cosPhi	I Amp

PST(B) – The advanced range


Technical data

www.nicsanat.com
021-87700210



Tripping curves for the integrated electronic overload protection

All units have an integrated electronic overload protection that can be set to four different tripping classes. Below you find a curve for each tripping class in cold state. These tripping curves are valid for PSE, PST, and PST(B).

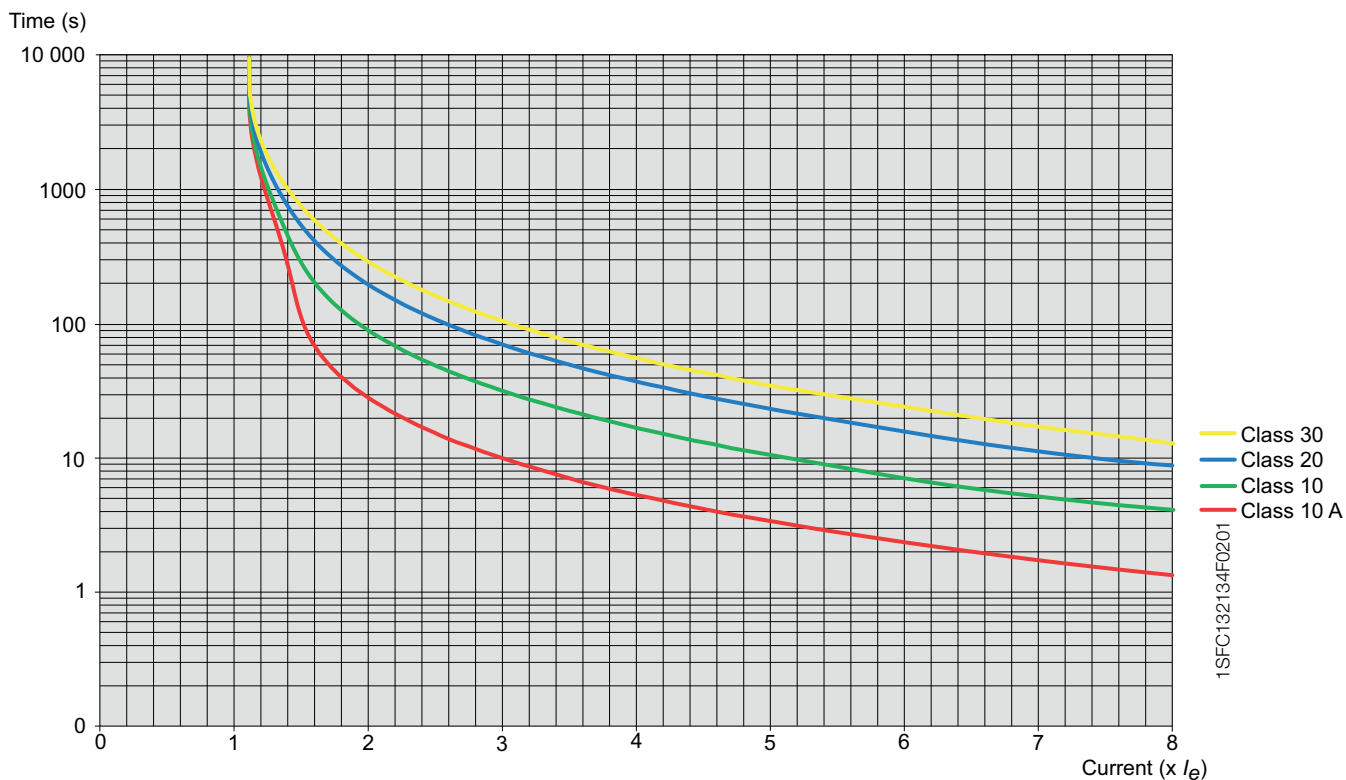

Tripping curves for electronic overload protection (Cold) for PSE, PST and PSTB.







PST(B) – The advanced range

Technical data

www.nicsanat.com
021-87700210



Cross section of connection cables

		Type of softstarter				
		PST30 ... 72	PST85 ... 142	PST175 ... 300	PSTB370 ... 470	PSTB570 ... 1050
Main circuit						
Available terminals:	L1, L2, L3	Yes	Yes	Yes	Yes	Yes
	T1, T2, T3	Yes	Yes	Yes	Yes	Yes
(For external by-pass)	B1, B2, B3	Yes	Yes	Yes	No	No
Connection clamp						
Solid/stranded	1 x mm ²	10 ... 95			See accessories	
Solid/stranded	2 x mm ²	6 ... 35			See accessories	
Tightening torque (recommended)	Nm	6.0			See accessories	
Connection bar	No					
Width and thickness	mm	–				
Hole diameter	mm	–				
Tightening torque (recommended)	Nm	–	18	28	35	45
Supply and control circuit						
Connection clamp				Yes		
Solid/stranded	1 x mm ²			2.5		
Solid/stranded	2 x mm ²			1.5		
Tightening torque (recommended)	Nm			0.5		

Fuse ratings and power losses

	Recommended ABB's overload protection		Max power loss at rated I _e					
For softstarter		Current range	without by-pass ²⁾	with by-pass	Max fuse rating - main circuit ^{1) 3)}			Power requirements supply circuit Holding (VA) / Pull-in (VA)
					Bussmann fuses, DIN43 620 (Knife)			
Type	Type	A	W	W	A	Type	Size	
PST								
PST30	Integrated	9...35	100	9.5	80	170M1566	000	5
PST37	Integrated	11...43	120	10.5	125	170M1568	000	5
PST44	Integrated	13...51	140	13.5	160	170M1569	000	5
PST50	Integrated	15...58	160	13.5	160	170M1569	000	5
PST60	Integrated	18...69	190	15.5	200	170M1570	000	5
PST72	Integrated	22...83	230	17	250	170M1571	000	5
PST85	Integrated	25...98	270	30.5	315	170M1572	000	10
PST105	Integrated	32...120	325	35	400	170M3819	1*	10
PST142	Integrated	43...163	435	37	450	170M5809	2	10
PST175	Integrated	53...201	540	62	500	170M5810	2	15
PST210	Integrated	63...241	645	67	630	170M5812	2	15
PST250	Integrated	75...288	765	67	700	170M5813	2	15
PST300	Integrated	90...345	920	90	900	170M6813	3	15
PSTB 600 V								
PSTB370	Integrated	111...425	N/A	90	700	170M5813	2	20/480
PSTB470	Integrated	141...540	N/A	110	900	170M6813	3	20/480
PSTB570	Integrated	171...655	N/A	105	900	170M6813	3	25/900
PSTB720	Integrated	216...828	N/A	110	1250	170M8554	3	25/860
PSTB840	Integrated	252...966	N/A	170	1500	170M6018 ⁴⁾	3	25/860
PSTB1050	Integrated	315...1207	N/A	170	1800	170M6020 ⁴⁾	3	25/860
PSTB 690 V								
PSTB370	Integrated	111...425	N/A	90	700	170M5813	2	20/480
PSTB470	Integrated	141...540	N/A	110	900	170M6813	3	20/480
PSTB570	Integrated	171...655	N/A	105	900	170M6813	3	25/900
PSTB720	Integrated	216...828	N/A	110	1250	170M8554	3	25/860
PSTB840	Integrated	252...966	N/A	170	1500	170M6018 ⁴⁾	3	25/860
PSTB1050	Integrated	315...1207	N/A	170	1600	170M6019 ⁴⁾	3	25/860

¹⁾ For the supply circuit 6 A delayed, for MCB use C characteristics.

²⁾ See PSS page 24

³⁾ Max fuse rating independent if in-line or inside delta connection. In inside delta connections of PST, the fuses can be placed outside of the delta. For PSTB the fuses shall be placed inside the delta. Contact ABB for more information.

⁴⁾ DIN43 653

PST(B) – The advanced range UL ratings

www.nicsanat.com
021-87700210



3-phase motor rating – in-line

Softstarters		Motor power P (hp) and full load current FLA (A)			
Type	Max. FLA A	U _e 200V/208 V hp	U _e 220 V/240 V hp	U _e 440 V/480 V hp	U _e 550 V/600 V hp
PST30	28	7.5	10	20	25
PST37	34	10	10	25	30
PST44	42	10	15	30	40
PST50	54	15	20	40	50
PST60	60	20	20	40	50
PST72	68	20	25	50	60
PST85	80	25	30	60	75
PST105	104	30	40	75	100
PST142	130	40	50	100	125
PST175	156	50	60	125	150
PST210	192	60	75	150	200
PST250	248	75	100	200	250
PST300	302	100	100	250	300
PSTB370	361	125	150	300	350
PSTB470	480	150	200	400	500
PSTB570	590	200	250	500	600
PSTB720	720	250	300	600	700
PSTB840	840	300	350	700	800
PSTB1050	1062	400	450	900	1000

3-phase motor rating – inside delta

Softstarters		Motor power P (hp) and full load current FLA (A)			
Type	Max. FLA A	U _e 200 V/208 V hp	U _e 220 V/240 V hp	U _e 440 V/480 V hp	U _e 550 V/600 V hp
PST30	42	10	15	30	40
PST37	54	15	20	40	50
PST44	72	20	25	50	60
PST50	80	25	30	60	75
PST60	104	30	40	75	100
PST72	104	30	40	75	100
PST85	130	40	50	100	125
PST105	156	50	60	125	150
PST142	192	60	75	150	200
PST175	248	75	100	200	250
PST210	302	100	100	250	300
PST250	361	125	150	300	350
PST300	480	150	200	400	500
PSTB370	590	200	250	500	600
PSTB470	720	250	300	600	700
PSTB570	840	300	350	700	800
PSTB720	1247	400	500	1000	1200
PSTB840	1454	500	600	1200	1500
PSTB1050	1839	600	700	1500	1800



DeviceNet FieldBusPlug

Ready-made DeviceNet fieldbus interface with various cable lengths.

- Applicable on all FBP motor starters and other devices
- Degree of protection IP65, diagnostic LED

Designation	Cable length	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
DeviceNet-FBP	0.25 m	DNP21-FBP.025	1SAJ230000R1003	1	0.09
DeviceNet-FBP	0.50 m	DNP21-FBP.050	1SAJ230000R1005	1	0.10
DeviceNet-FBP	1.00 m	DNP21-FBP.100	1SAJ230000R1010	1	0.13
DeviceNet-FBP	5.00 m	DNP21-FBP.500	1SAJ230000R1050	1	0.36



DNP21-FBP
MRP21-FBP
COP21-FBP

MODBUS-RTU FieldBusPlug

Ready-made MODBUS-RTU fieldbus interface with various cable lengths.

- Applicable on all FBP motor starters and other devices
- Degree of protection IP65, diagnostic LED

Designation	Cable length	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
MODBUS-RTU-FBP	0.25 m	MRP21-FBP.025	1SAJ250000R0003	1	0.09
MODBUS-RTU-FBP	0.50 m	MRP21-FBP.050	1SAJ250000R0005	1	0.10
MODBUS-RTU-FBP	1.00 m	MRP21-FBP.100	1SAJ250000R0010	1	0.13
MODBUS-RTU-FBP	5.00 m	MRP21-FBP.500	1SAJ250000R0050	1	0.36

CANopen FieldBusPlug

Ready-made CANopen fieldbus interface with various cable lengths.

- Applicable on all FBP motor starters and other devices
- Degree of protection IP65, diagnostic LED

Designation	Cable length	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
CANopen-FBP	0.25 m	COP21-FBP.025	1SAJ230100R1003	1	0.09
CANopen-FBP	0.50 m	COP21-FBP.050	1SAJ230100R1005	1	0.10
CANopen-FBP	1.00 m	COP21-FBP.100	1SAJ230100R1010	1	0.13

To connect the PST softstarter to a DeviceNet or CANopen fieldbus system...

you need specific software for PLC setup, (EDS file) which is available at www.abb.com/lowvoltage on the Softstarter pages. Look under the documentation-link named Software. If you need help or advice, please contact your local ABB office.

Accessories for the DeviceNet, MODBUS-RTU and CANopen bus connector



DNF11-FBP.050



DNM11-FBP.050



DNX11-FDP

DeviceNet, MODBUS-RTU and CANopen round cable for bus junctions

Ready-made bus cable with an M12 connector and an open cable end.

Designation	Cable length	Type	Order code	Packing piece	Weight kg 1 piece
Round cable with female connector	0.50 m	DNF11-FBP.050	1SAJ923002R0005	1	0.04
Round cable with male connector	0.50 m	DNM11-FBP.050	1SAJ923003R0005	1	0.04

DeviceNet, MODBUS-RTU and CANopen round cable for bus extension

Ready-made bus cable with M12 male and female connectors

Designation	Cable length	Type	Order code	Packing piece	Weight kg 1 piece
Extension cable	1.00 m	DNX11-FBP.100	1SAJ923001R0010	1	0.08
Extension cable	3.00 m	DNX11-FBP.300	1SAJ923001R0030	1	0.20
Extension cable	5.00 m	DNX11-FBP.500	1SAJ923001R0050	1	0.31
Round cable	100.00 m	DNC11-FBP.999	1SAJ923004R0001	1	5.60

DeviceNet, MODBUS-RTU and CANopen round cable connectors

Bus cable and coupling accessories



DNM11-FBP.0

DNF11-FBP.0



DNR11-FBP.120

Designation	Type	Order code	Packing piece	Weight kg 1 piece
Male connector for round cable	DNM11-FBP.0	1SAJ923005R0001	5	0.15
Female connector for round cable	DNF11-FBP.0	1SAJ923006R0001	5	0.15

DeviceNet, MODBUS-RTU and CANopen termination resistor

Designation	Type	Order code	Packing piece	Weight kg 1 piece
Termination Resistor, 120 Ohm	DNR11-FBP.120	1SAJ923007R0001	1	0.02

FBP FieldBusPlug

Profibus DP, ordering details



PDP22-FBP

Profibus DP FieldBusPlug

Ready-made Profibus DP fieldbus interface with various cable lengths.

- Supports PROFIBUS DP V0 and V1
- Applicable on all FBP motor starters and other devices
- Degree of protection IP65, diagnostic LED



Designation	Cable length	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
Profibus DP FBP	0.25 m	PDP22-FBP.025	1SAJ240100R1003	1	0.09
Profibus DP FBP	0.50 m	PDP22-FBP.050	1SAJ240100R1005	1	0.10
Profibus DP FBP	1.00 m	PDP22-FBP.100	1SAJ240100R1010	1	0.13
Profibus DP FBP	2.00 m	PDP22-FBP.200	1SAJ240100R1020	1	0.20
Profibus DP FBP	5.00 m	PDP22-FBP.500	1SAJ240100R1050	1	0.36



PDQ22-FBP

Profibus DP FieldBusPlug for four devices

PDQ22 is a member of the ABB's FieldBusPlug family of bus connectors. It allows the connection of up to four devices to Profibus DP by just using one Profibus node access. This allows a cost efficient device integration for devices that are located physically nearby. PDQ22 supports DP-V0 and DP-V1. The degree of protection is IP66. There are separate diagnosis LEDs for bus and device status.

Note that the accessory PDQ22-FBP only works with the PSR and PSE and not with the PST(B) softstarter.

Designation	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
Quadruple bus connector	PDQ22-FBP	1SAJ240200R0050	1	0.20
DINrail adapter for PDQ22-FBP	CDA11-FBP.0	1SAJ929300R0001	1	0.11
Fixing bracket for passive plug of connection cable	CDP11-FBP.0	1SAJ929100R0001	1	0.50

Configuration software

This cable and software can be used for setup and commissioning of the softstarter as well as to keep back-up of the parameter settings.



2DC3410/IS010

Designation	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
USB to FBP interface cable	UTF21-FBP	1SAJ929400R0002	1	
PDP22/PDQ22 Device Type Manager (DTM) incl. FDT/DTM frame application	PBDTM-FBP	1SAJ924012R0005	1	

To connect the PST softstarter to a Profibus DP fieldbus system...

you need specific software for PLC setup, (GSD file) which is available at www.abb.com/lowvoltage on the softstarter pages. Look under the documentation-link named Software. If you need help or advice, please contact your local ABB office.

PDP21 is replaced by PDP22.

Use PDP22 with the GSD-file Abb_082d.gsd regardless if the PLC is a DP/V0 or DP/V1.

FBP FieldBusPlug

Profibus DP accessories, ordering details



Accessories for the Profibus DP Bus Connector

Profibus DP Round cable for Bus Junctions

Ready-made bus cable with an M12 connector and an open cable end.

- Application on bus junctions such as e.g. Profibus DB couplers or devices with an integrated Profibus DB interface

Designation	Cable length	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
Round cable with female connector	0.50 m	PDF11-FBP.050	1SAJ924002R0005	1	0.04
Round cable with male connector	0.50 m	PDM11-FBP.050	1SAJ924003R0005	1	0.04

Profibus DP round cable for bus extension

Ready-made bus cable with M12 male and female connectors

Round cable on coil

Designation	Cable length	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
Extension cable	0.50 m	PDX11-FBP.050	1SAJ924001R0005	1	0.04
Extension cable	1.00 m	PDX11-FBP.100	1SAJ924001R0010	1	0.08
Extension cable	3.00 m	PDX11-FBP.300	1SAJ924001R0030	1	0.20
Extension cable	5.00 m	PDX11-FBP.500	1SAJ924001R0050	1	0.31
Round cable	100.00 m	PDC11-FBP.999	1SAJ924004R1000	1	5.60

Profibus DP accessories for bus extension

Designation	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
Male Connector for round cable	PDM11-FBP.0	1SAJ924005R0001	5	0.03
Female Connector for round cable	PDF11-FBP.0	1SAJ924006R0001	5	0.03

Profibus DP termination resistor, miscellaneous accessories

Designation	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
Termination resistor, 150 Ohm	PDR11-FBP.150	1SAJ924007R0001	1	0.03
Feeding connector 24V DC, Code B-A	PDV11-FBP.0	1SAJ924008R0001	1	0.04
Feeding connector 24V DC, Code A-A	PDV12-FBP.0	1SAJ924011R0001	1	0.04
Adaptor M12-Dsub9-M12 Cable length 0.50m	PDA11-FBP.050	1SAJ924009R0001	1	0.04
Adaptor M12-Dsub9-M12 Cable length 2 x 0.50m	PDA12-FBP.050	1SAJ924010R0001	1	0.04

Extension cable




Designation	Cable length	Type	Order code	Pack ^{ing} piece	Weight kg 1 piece
Extension cable (female/male), shielded	0.3 m	CDP15-FBP.030	1SAJ929140R0003	1	
Extension cable (female/male), shielded	0.6 m	CDP15-FBP.060	1SAJ929140R0006	1	
Extension cable (female/male), shielded	1.5 m	CDP15-FBP.150	1SAJ929140R0015	1	0.20
Extension cable (male/open), shielded	1.5 m	CDP16-FBP.150	1SAJ929150R0015	1	0.20

Wall mounting instructions Softstarters

www.nicsanat.com
021-87700210



Minimum distance to wall/front

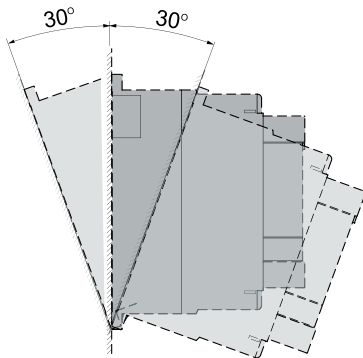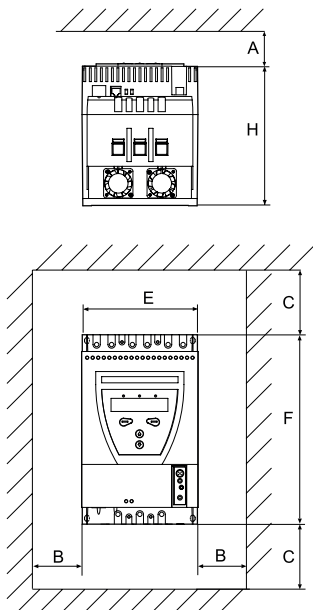


Dimensions


Softstarter, type	A	B	C	E	F	H
PSR						
PSR3 ... 16	25	0*	0	45	140	114
PSR25 ... 30	25	0*	0	45	160	128
PSR37 ... 45	25	0*	0	54	187	153
PSR60 ... 105	25	0*	0	70	220	180
PSS ... -500 for 500 V						
PSS18/30 ... 44/76	20	10	100	120	200	162
PSS50/85 ... 72/124	20	10	100	140	250	162
PSS85/147 ... 142/245	20	10	100	181	340	265
PSS175/300 ... 300/515	20	10	100	356	340	265
PSS ... -690 for 690 V						
PSS18/30 ... 72/124	20	10	100	140	250	163
PSS85/147 ... 142/245	20	10	100	181	340	265
PSS175/300 ... 300/515	20	10	100	356	340	265
PSE						
PSE18 ... 105	20	10	100	90	245	185.5
PSE142 ... 170	20	10	100	130	295	219.5
PSE210 ... 370	20	10	100	190	550	236.5
PST						
PST30 ... 72	20	10	100	160	260	196
PST85 ... 142	20	10	100	186	390	270
PST175 ... 300	20	10	100	360	420	270
PSTB						
PSTB370 ... 470	20	15	150	365	460	361
PSTB570 ... 1050	20	15	150	435	515	381

*) 5 mm for the 24 V DC version

Dimensions PSTEK

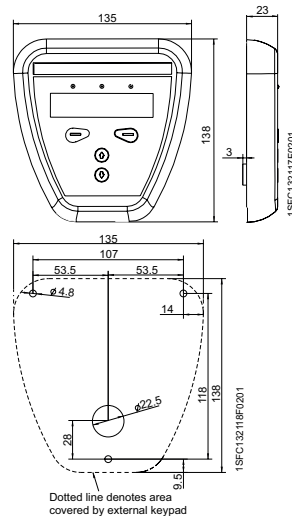

PSEEK

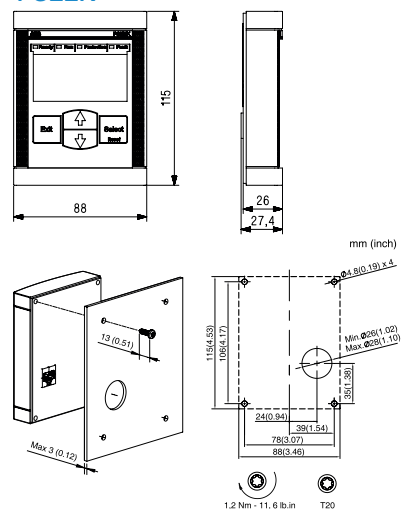


Dimensions in mm


Dimensions

Softstarters, type PSR


PSR3 ... 16

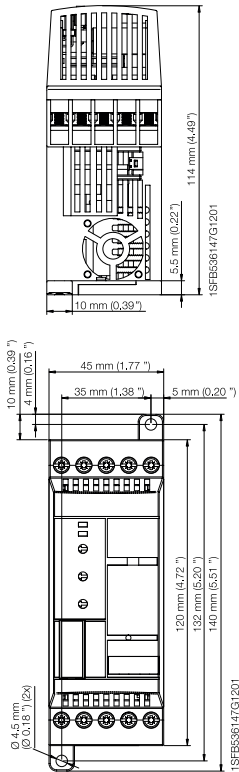


PSR37 ... 45

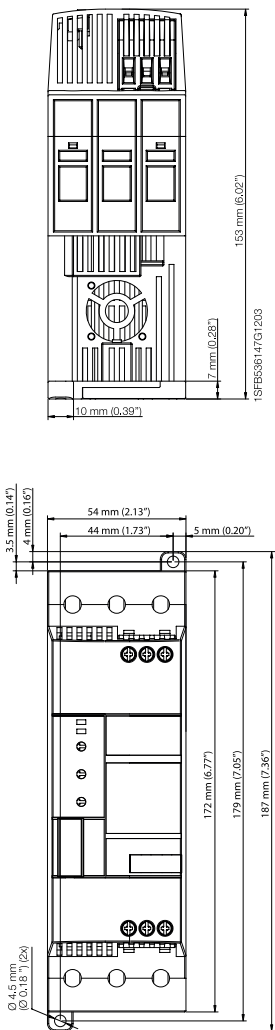

PSR60 ... 105

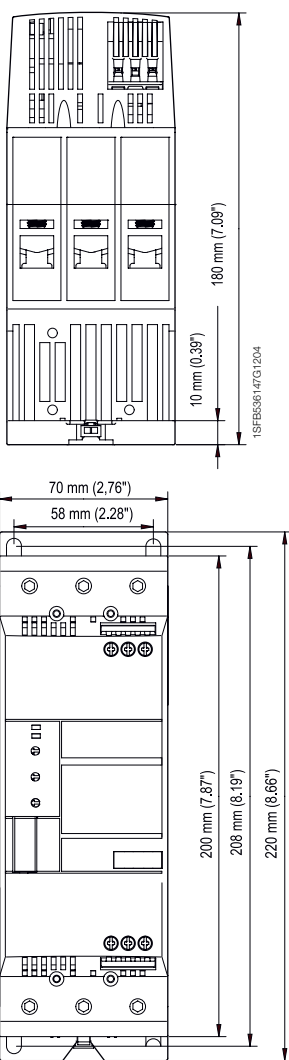

PSR25 ... 30

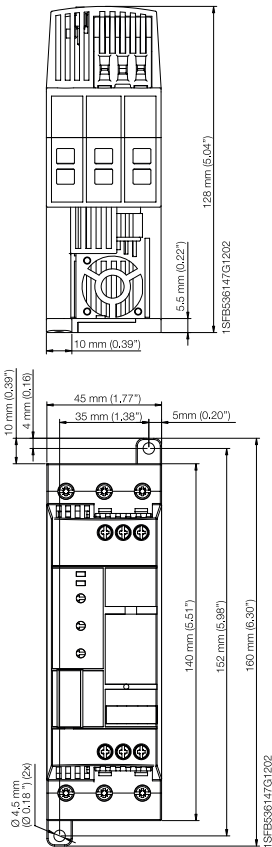


Dimensions in mm (and inches)

Dimensions Softstarters, type PSS


www.nicsanat.com
021-87700210




PSS18/30-500 ... 44/76-500

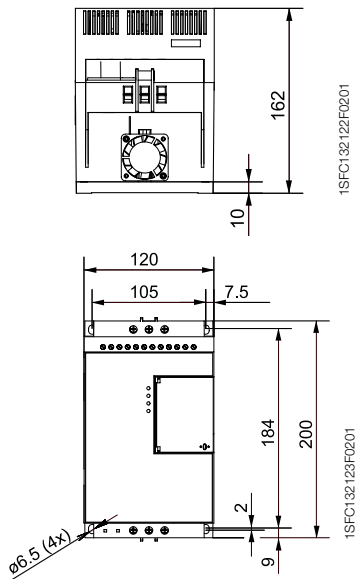


PSS50/85-500 ... 72/124-500
PSS18/30-690 ... 72/124-690

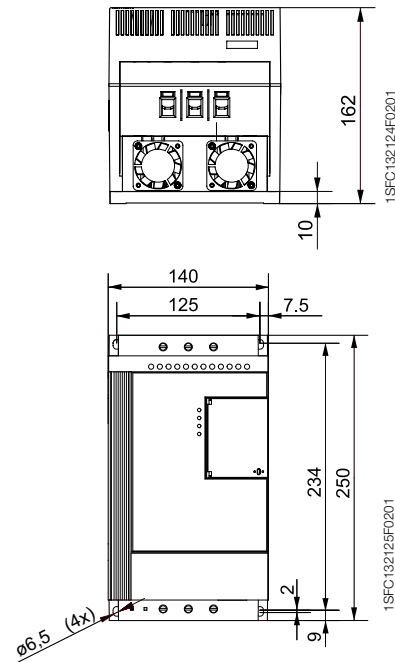

PSS85/147-500 ... 142/245-500
PSS85/147-690 ... 142/245-690

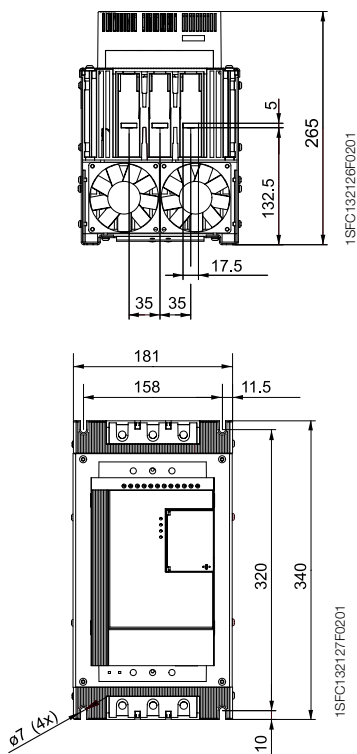

PSS 175/300-500 ... 300/515-500
PSS 175/300-690 ... 300/515-690

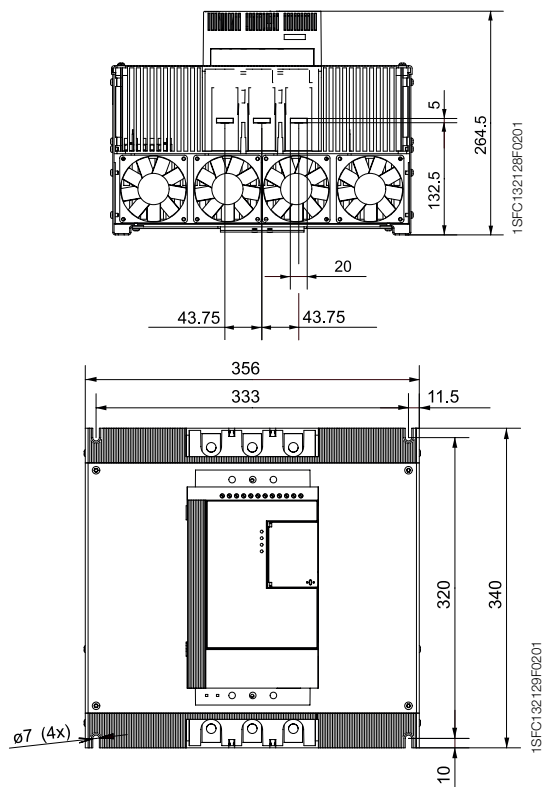

Dimensions in mm


Dimensions

Sofstarters, type PSE


www.nicsanat.com
021-87700210




PSE18 ... 105

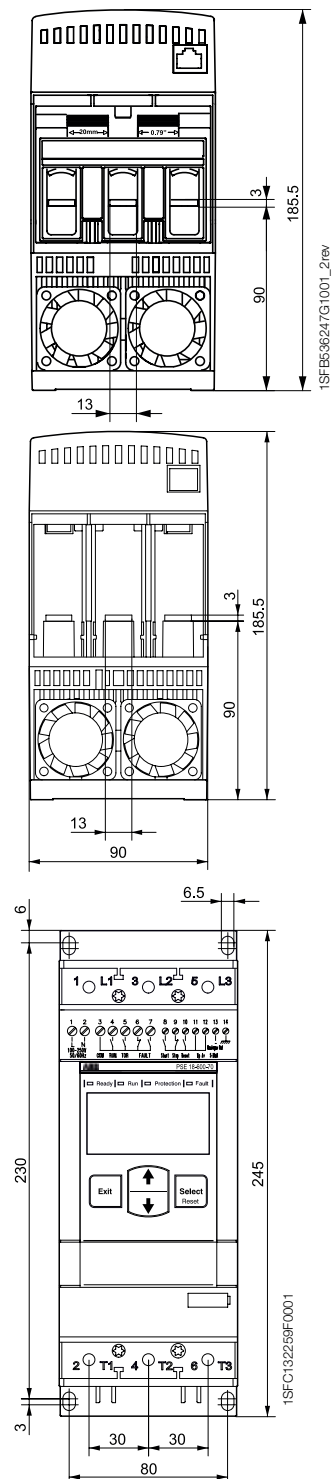

PSE142 ...170

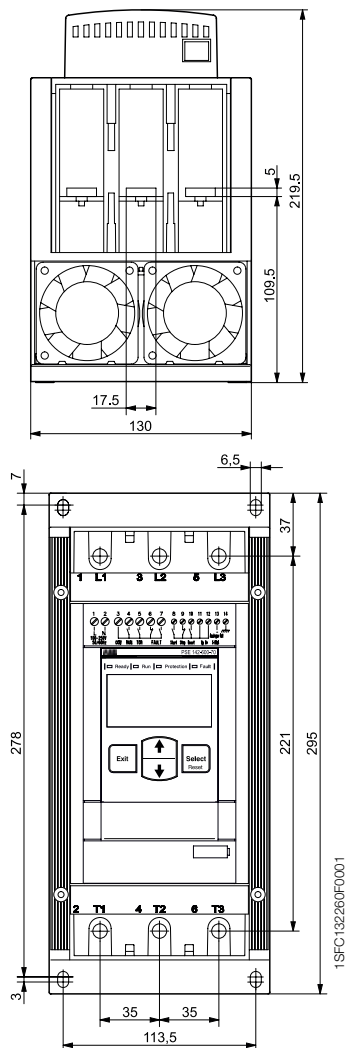

PSE210 ... 370

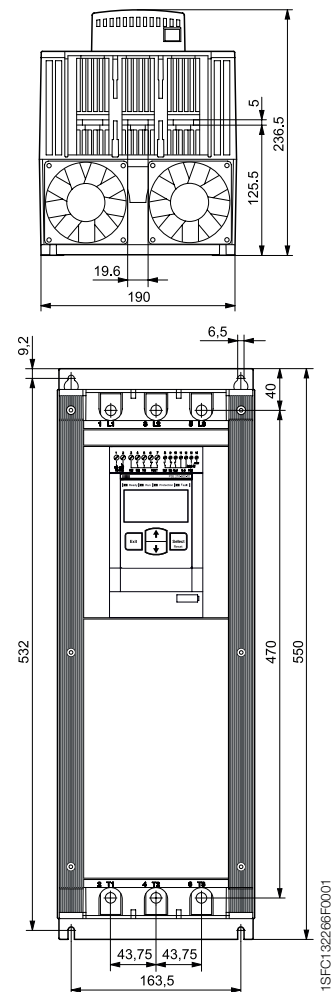

Dimensions in mm


Dimensions

Softstarters, type PST and PSTB


www.nicsanat.com
021-87700210




PST30 ... 72




PST85 ...142




PST85 ...142 with marine kit




1SFC132130F0201

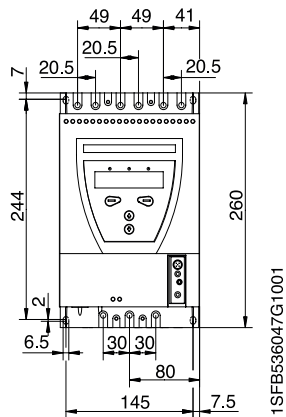

1SFB536047G1001


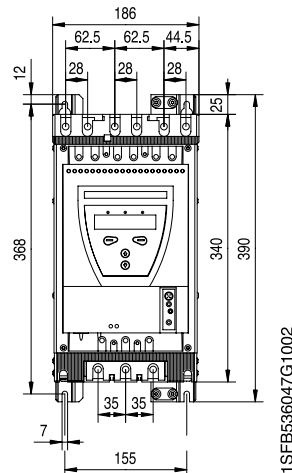


1SFB536047G1002

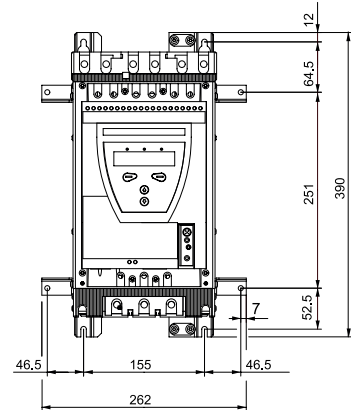



1SFC132131F0201

PST175 ... 300

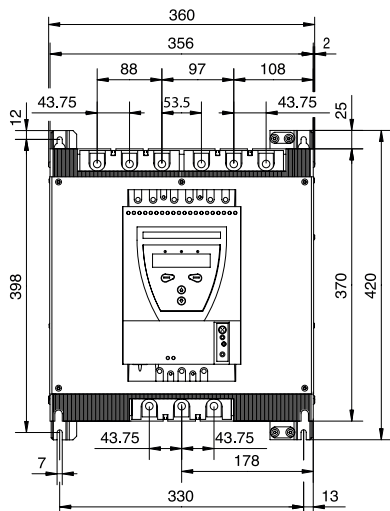



1SFB536047G1003

PSTB370 ... 470

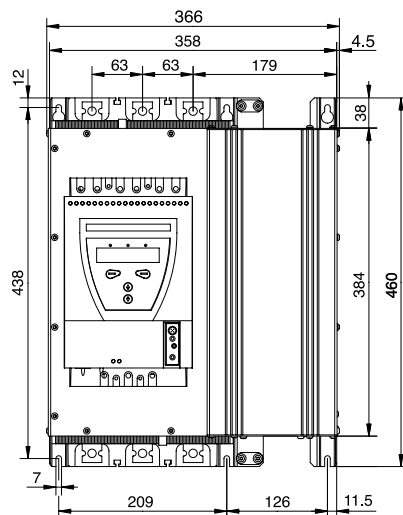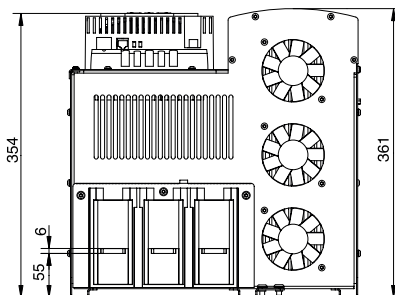

1SFB536047G1004

PSTB570 ... 1050

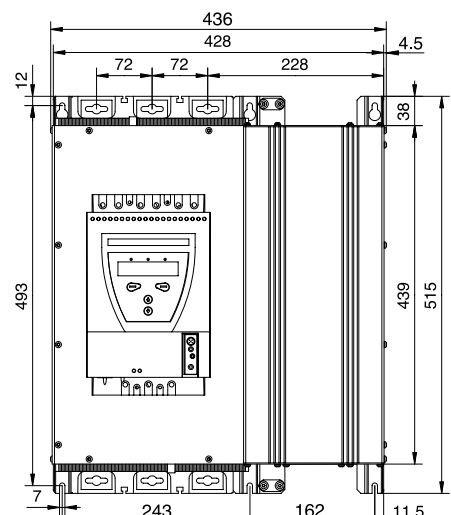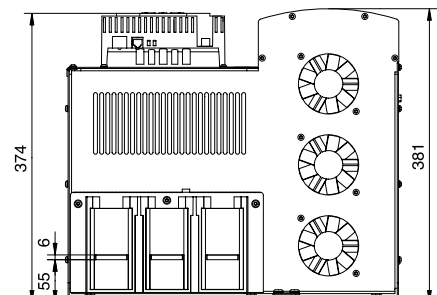

1SFB536047G1005

Dimensions in mm

Circuit diagrams


Softstarters, type PSR

www.nicsanat.com
021-87700210




PSR3 ...16


A) With MMS

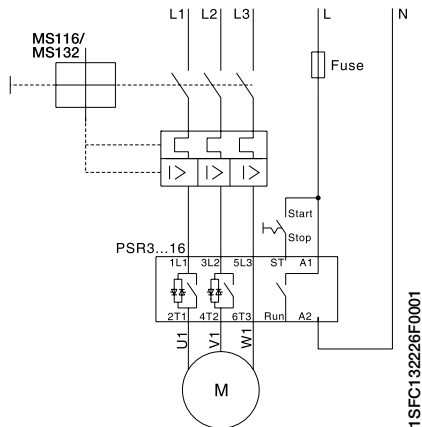

B) With MMS and auxiliary contact

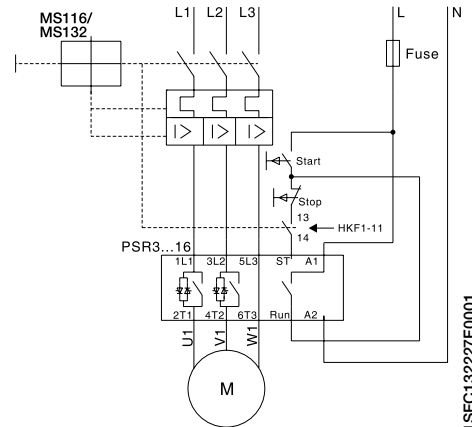


C) With fuses, contactor and O.L.

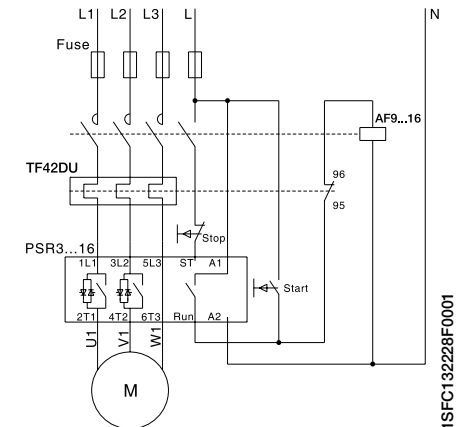


PSR25 ... 45


D) With MMS

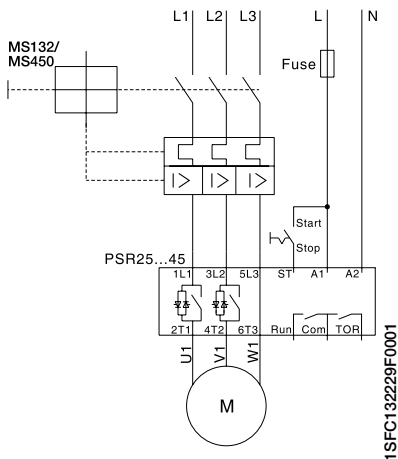

E) With MMS and auxiliary contact

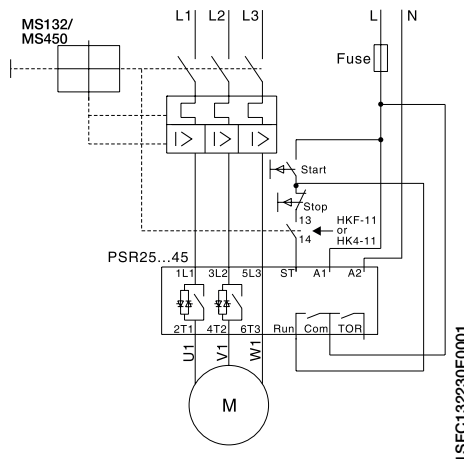


F) With fuses, contactor and O.L.

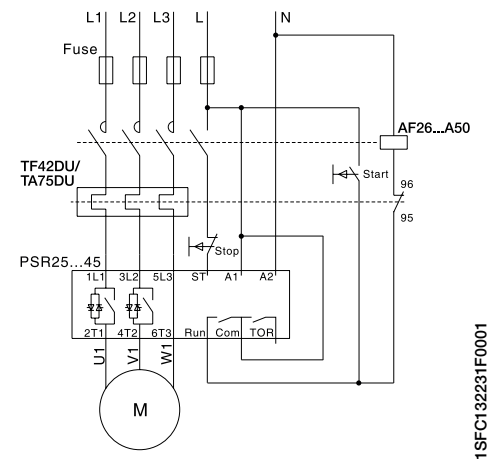


PSR60 ... 105


G) With MMS

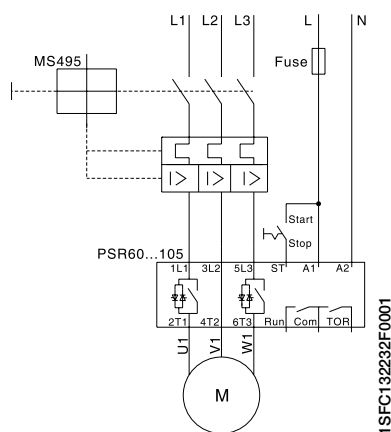

H) With MMS and auxiliary contact

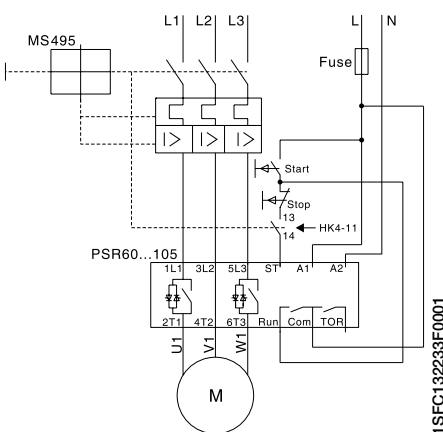

I) With fuses, contactor and O.L.

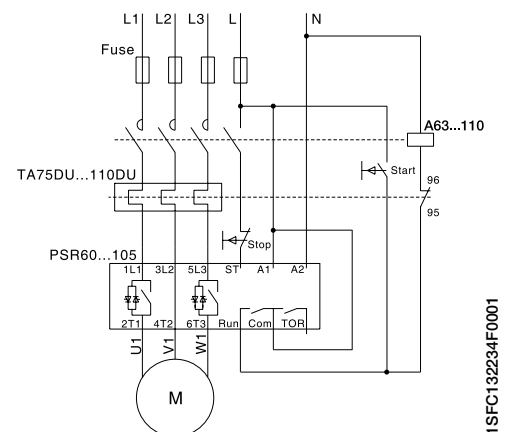


Circuit diagrams

Softstarters, type PSS and PSE


www.nicsanat.com
021-87700210



PSS18/30...300/515

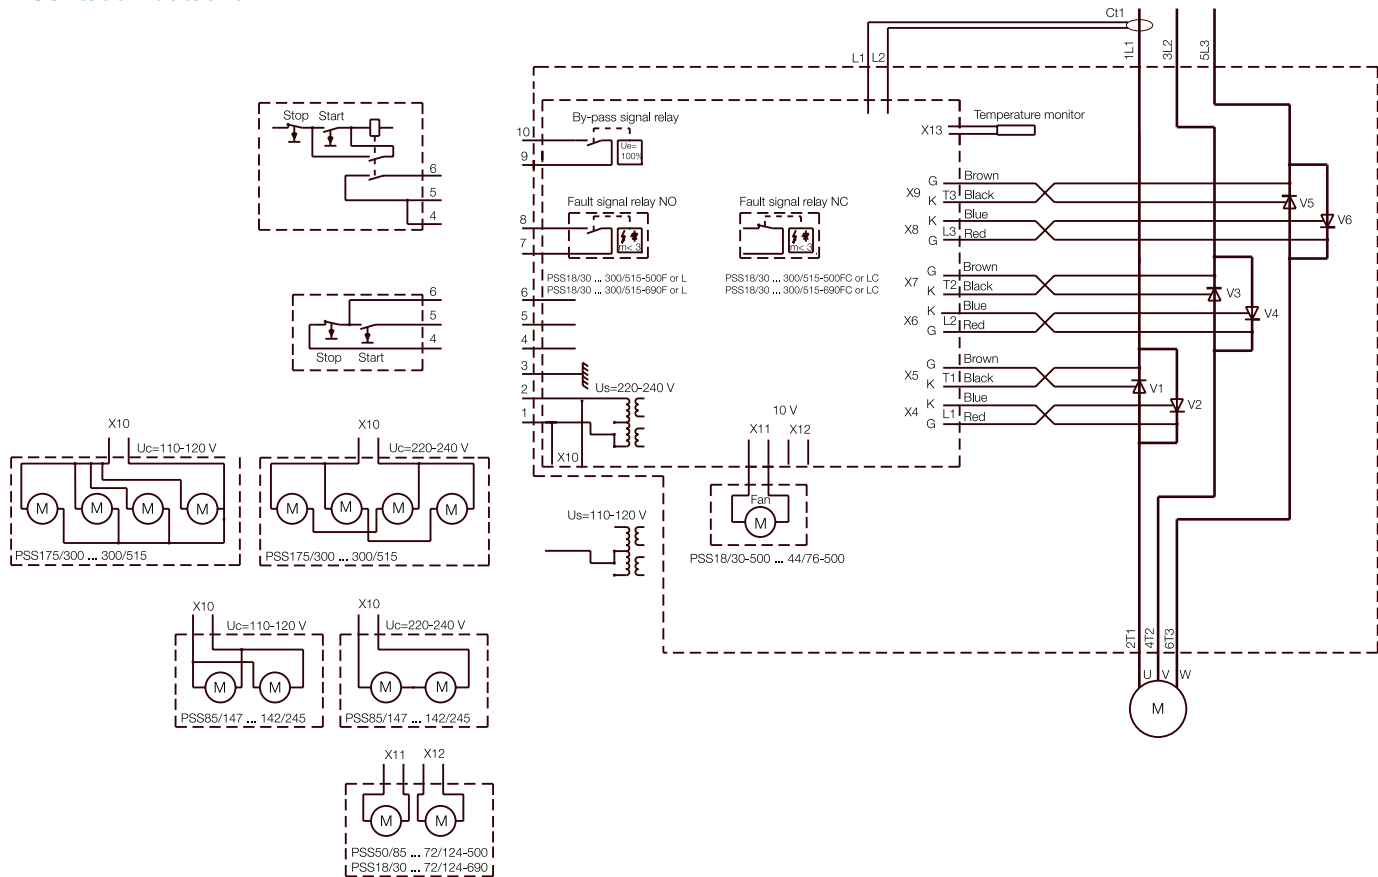

PSE18 ... 370

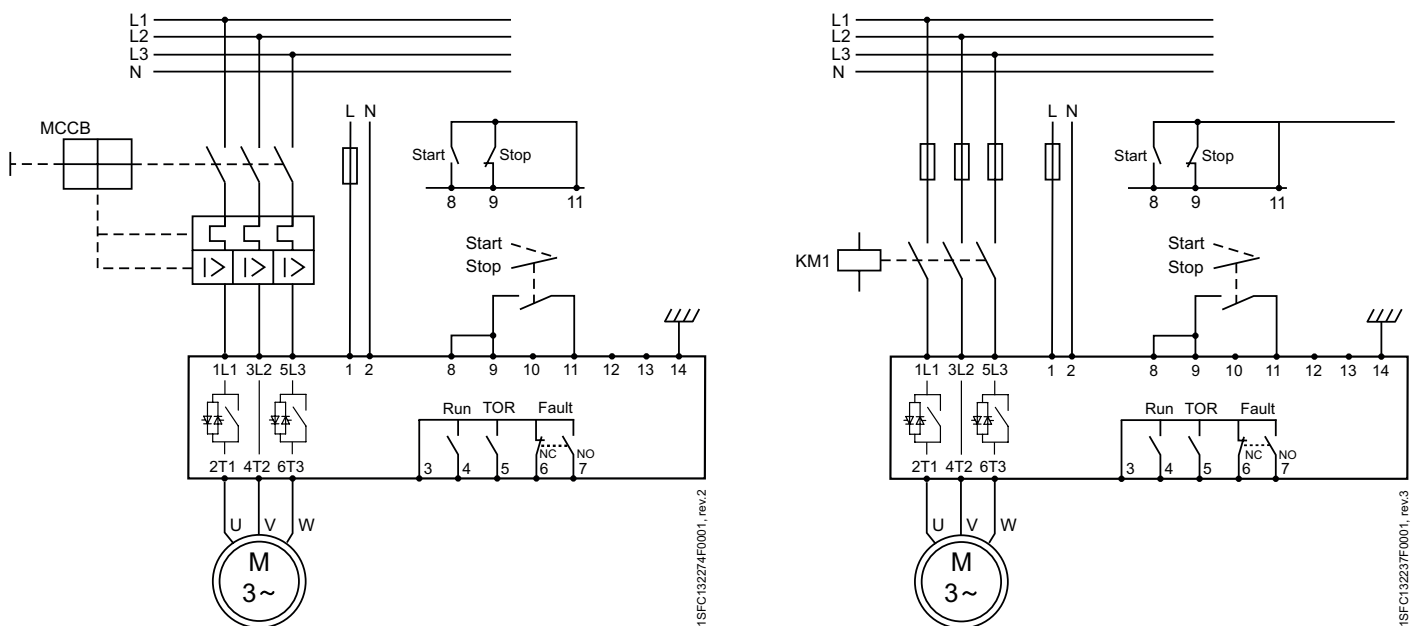

For more circuit diagrams see www.abb.com/lowvoltage, choose Control Products, Softstarters and Softstarters once more.


Circuit diagrams

Softstarters, type PST and PSTB


www.nicsanat.com
021-87700210



PST30...300

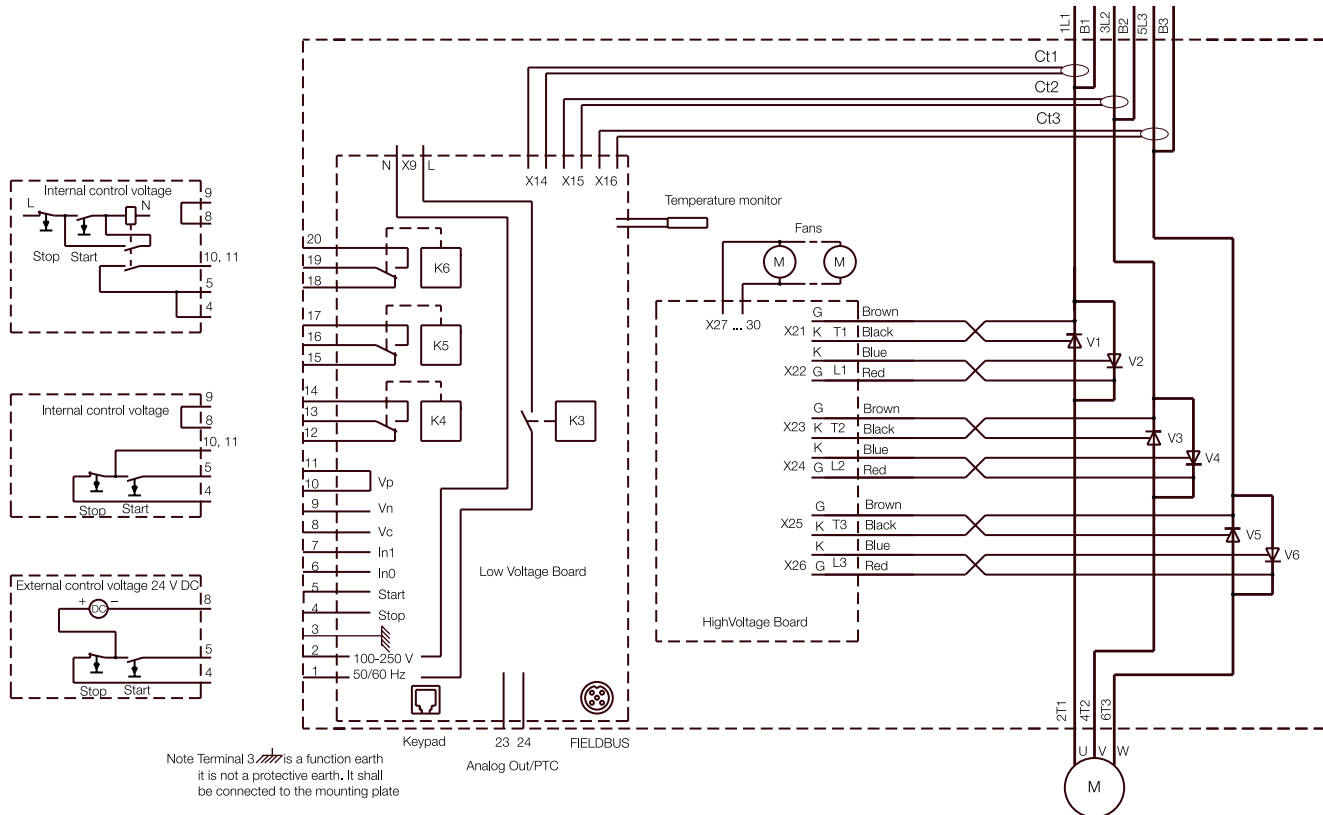

PSTB370...1050

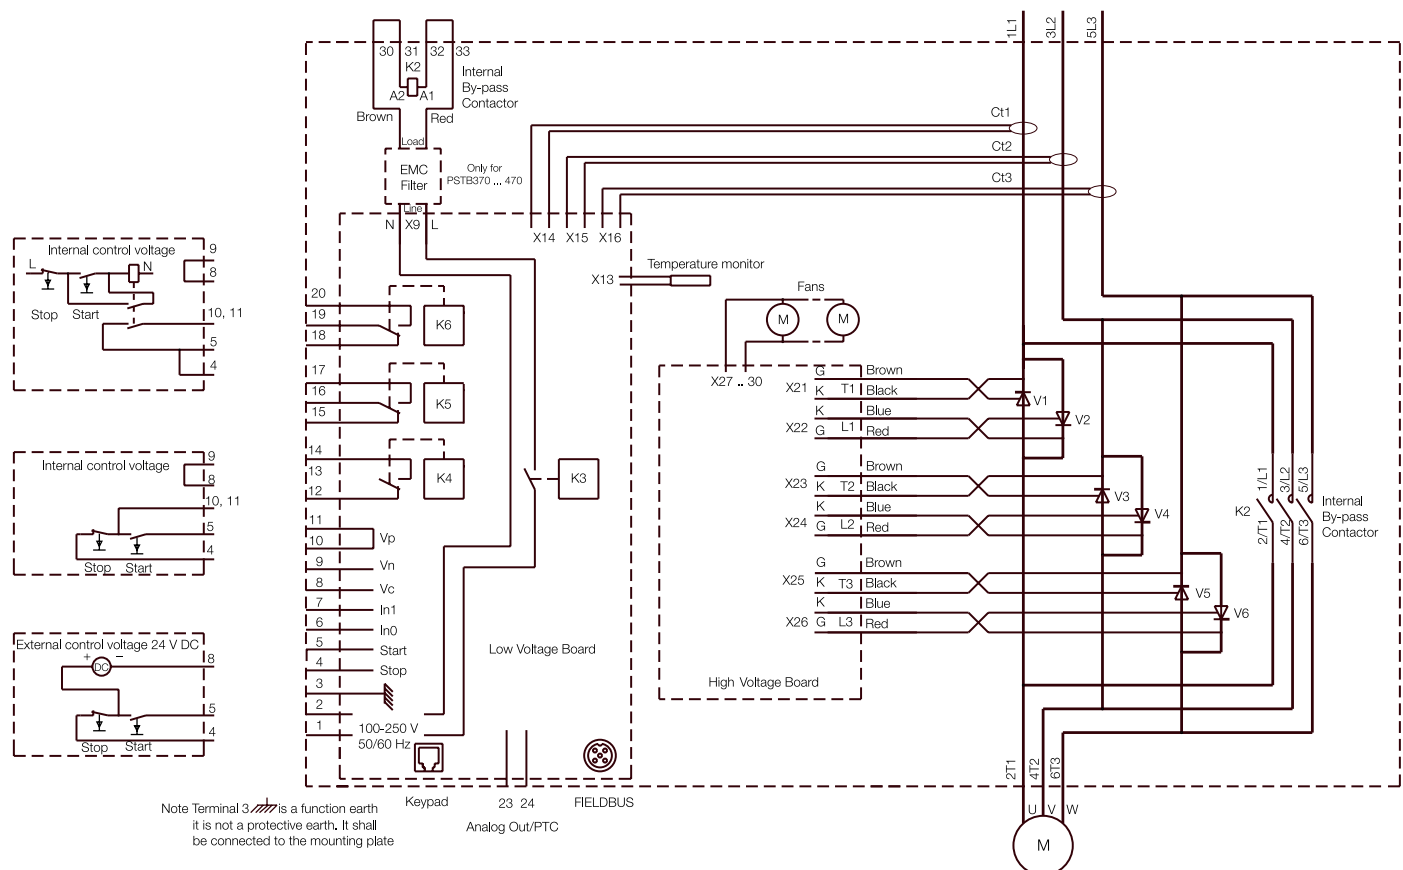

For more circuit diagrams see www.abb.com/lowvoltage, choose Control Products, Softstarters and Softstarters once more.

Softstarter selection tool

The selection of a softstarter can be done according to this catalog. This will work fine in the majority of cases but by using the softstarter selection tool, a more optimized selection will be achieved. Especially in extremely heavy-duty applications with several minutes starting time, the use of the selection tool is recommended.

When using the softstarter selection tool, the selection is done in three steps, which can be seen as three different tabs in the program:

1. Input tab – Type in the general data and information about the motor and about the load. Try to use as accurate data as possible to get the most accurate results.
2. Calculation tab – Here it is possible to see how long the start will be depending on how high the current is. This tab will indicate which settings should be used and it might affect the selection.
3. The selection tab – Select which of the suggested softstarters to use. Here it is also possible to generate a report about the selection.

The softstarter selection tool can be downloaded from www.abb.com/lowvoltage by choosing Support "Online Product Selection Tools", Online Tools, Softstarters.



Softstarter selection

Coordination tables

Coordination is a combination of electrical apparatus which is safe for the surroundings and personnel, even if an overload or a fault should occur in the system. ABB's coordination tables are available for different combinations of products. The softstarter coordination tables are available with different protection devices (MMS, MCCB and semiconductor fuses), different coordination types (type 1 and type 2), different kA-ratings and for different connections (In-line and inside delta).

The coordination tables can be found on www.abb.com/lowvoltage by clicking "Online Product Selection Tools" and "Coordination Tables for motor protection".




Coordination tables

SoftstarterCare™ – Service Engineer Tool

The service engineer tool makes softstarter commissioning easier than it has ever been. With the tool, tuning of parameters can be made on a PC. By just plugging the PC to the softstarter, using ABB's cable (1SFA897201R1001), the parameter settings can be uploaded to the softstarter. This makes it very fast and easy to set up multiple PSE softstarters. Service Engineer Tool gives you:

- Access to all parameters on the HMI available on a PC
- Access to additional parameters that can't be reached from the HMI
- Access to the PSE event log
- PSE softstarter status information
- Trouble shooting form with pre-filled softstarter information
- Access to upgrade the softstarter firmware

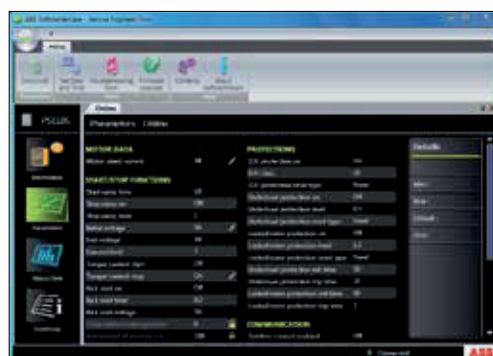

SoftstarterCare 64bits



SoftstarterCare 32bits

The table below shows the approvals and certifications for different softstarters.

For approvals and/or certificates not listed below, please contact your local ABB sales office.

Certifications and approvals

Abbreviation approved in	Certifications							Approvals: ship classification societies		
										
	CE EU	UL USA	cULus Canada USA	CSA Canada	CCC China	GOST Russia	ANCE Mexico	C-tick Australia	ABS American Bureau of Shipping	GL Germany
PSR3 ... PSR105	•	• ¹⁾	•	• ¹⁾	•	•	—	•	—	—
PSS18/30 ... PSS300/515	•	•	—	•	•	•	•	•	—	—
PSE18 ... PSE370	•	• ¹⁾	•	• ¹⁾	•	•	•	•	—	—
PST30 ... PSTB1050	•	• ¹⁾	•	• ¹⁾	•	•	•	•	•	•

• **Standard design approved**, the company labels bear the certification mark when this is required.

1) Covered by cULus certificate

Directives and standards

No. 2006/95/EC	Low voltage equipment
No. 2004/108/EC	Electromagnetic compability
EN 60947-1	Low-voltageswitchgear and controlgear - Part 1: General rules
EN 60947-4-2	AC semiconductor motor controllers and starters
UL 508	Industrial Control Equipment
CSA C22.2 No 14	Industrial Control Equipment

Material available on www.abb.com/lowvoltage

The following material is a selection of all softstarter related material that is available on www.abb.com/lowvoltage. Just click on "Control Products", "Softstarters", "Softstarters".

- Product catalogs and brochures
- Certificates and approvals
- Circuit diagrams and application diagrams
- Dimension drawings (2D and 3D)
- Manuals
- eds- and gsd-files for fieldbus connection
- Softstarter selection tool



ABB AB

Low Voltage Products

Control Products

SE-721 61 VÄSTERÅS, Sweden

www.abb.com/lowvoltage

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents - in whole or in parts - is forbidden without prior written consent of ABB.

Copyright© 2013 ABB
All rights reserved



To get more information, install QR code reader on your mobile device, scan the code and see more.