



Global Power Electronics Company

www.nicsanat.com

021-87700210



AD Advanced Drive Technology
motor control & power conversion

www.adtech21.com

56 Beolmal-ro, Dongan-gu, Anyang-si, Gyeonggi-do, 14059, Korea

TEL : 82-31-459-5051 FAX : 82-31-459-5053

Specifications of the product are subject to change without notice for quality improvement.

Printed in Korea



www.nicsanat.com

021-87700210



iMASTER U1

Powerful Micro Drive



Features

Toughness & Easy to Use + General Purpose

Design Simple & Stylish appearance

Compact Minimize the space

Operation Easy Installation & Simple Operation



Applications

Suit for various machines

Supreme Performance

- User Friendly
- Built in PID function
- Traverse Operation

Powerful Torque

- V/F Control
- Sensorless Vector Control
- Powerful torque at low speed (150% @ 1Hz)

High Reliability

- Global Standard ; UL, CE, RoHS
- Conformal coating of internal PC board for harsh environment

Food. Mixer

Fan. Pump

Wood machine


Conveyor



www.nicsanat.com
021-87700210



■ Adoption of optimal algorithm to minimize the motor loss

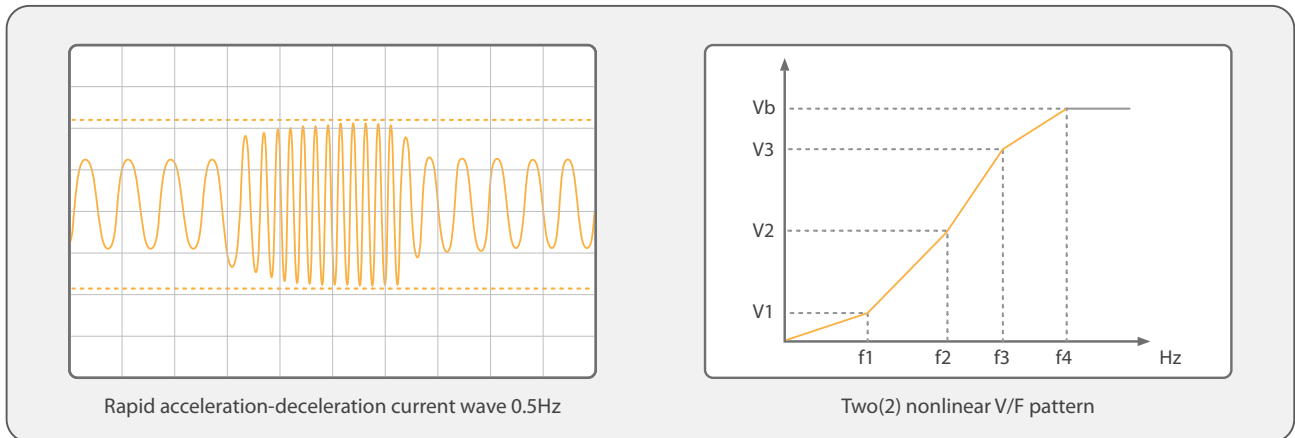


■ Standard RS-485 communication



■ Built in PID control

PID function is enable to temperature, flow or pressure control by proportional action(P), integral action(I) and derivative action(D) to reduce the difference between actual and target value.

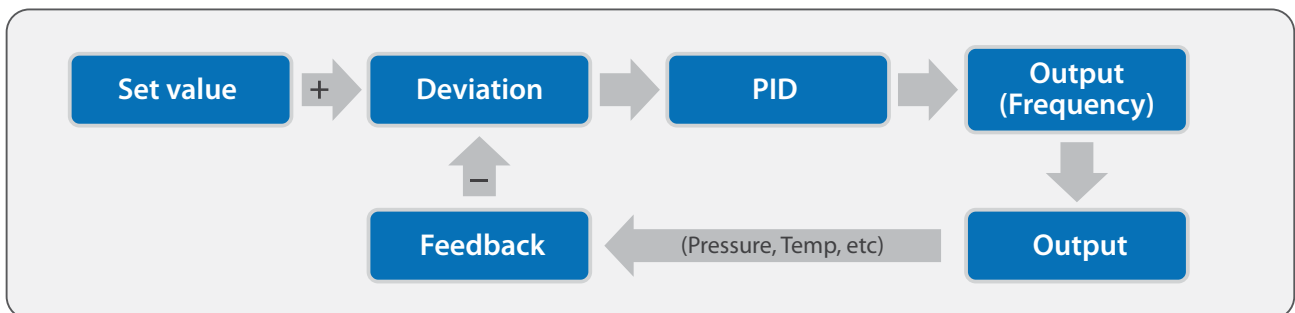

■ Various Functions

- Analog Input (0~10V, 4~20mA)
- Multi step operation (16 step)
- Jog operation

■ Global Standard




Product range and Model name

■ Product range

Motor Capacity (kW)	3 Phase 400V	1 Phase 200V
Standard Specification		
0.4	U1-0040-4	U1-0040-7
0.75	U1-0075-4	U1-0075-7
1.5	U1-0150-4	U1-0150-7
2.2	U1-0220-4	U1-0220-7
3.7	U1-0370-4	

■ Model Name

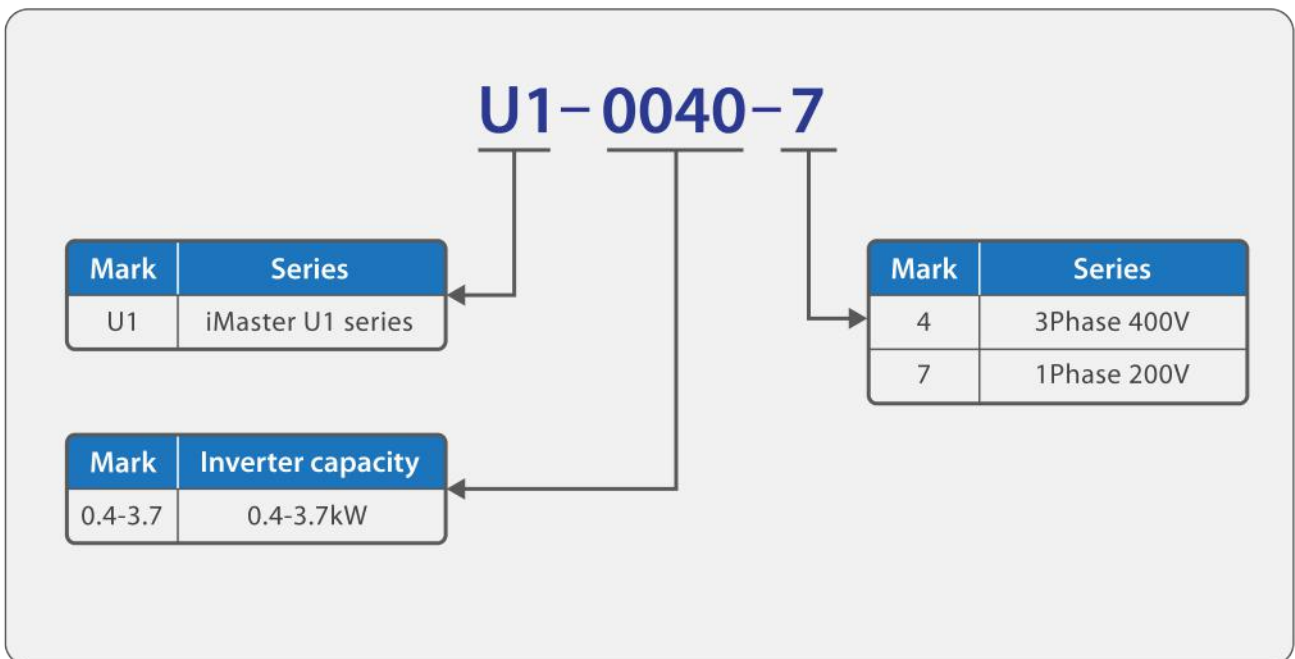

www.nicsanat.com
021-87700210



■ 3 Phase 400V

Item		Specification				
Type (U1-□□□□-4)		U1-0040-4	U1-0075-4	U1-0150-4	U1-0220-4	U1-0370-4
Applicable Motor [kW]		0.4	0.75	1.5	2.2	3.7
Rated Output	Rated Voltage [V]	3 Phase 380V ~ 480V (with AVR function)				
	Rated Current [A]	1.8	2.5	4.3	6.3	10.5
	Overload Capacity	150% @ rated output frequency - 1 min. 200% @ rated output frequency - 0.5 sec.				
	Rated Frequency (Fluctuation)	0.01~400Hz				
Rated Input	Available Voltage [V]	3 Phase 380V (-15%) ~ 480V (+10%)				
	Frequency [Hz]	50/60Hz (Fluctuation : ±5%)				
	Input Current [A]	1.7	3.1	5.9	8.2	13
Braking Transistor		Built in				
Protection Degree		IP20 (IEC 60529), UL open type (UL50)				
Cooling Method		Natural		Forced		
Weight (kg)		0.8	0.8	0.9	0.9	1.3

■ 1 Phase 200V


Item		Specification			
Type (U1-□□□□-7)		U1-0040-7	U1-0075-7	U1-0150-7	U1-0220-7
Applicable Motor [kW]		0.4	0.75	1.5	2.2
Rated Output	Rated Voltage [V]	3 Phase 200V ~ 240V (with AVR function)			
	Rated Current [A]	3.5	4.2	9.2	10
	Overload Capacity	150% @ rated output frequency - 1 min. 200% @ rated output frequency - 0.5 sec.			
	Rated Frequency (Fluctuation)	50/60 Hz (Fluctuation 5%) 0.01 ~ 400Hz			
Rated Input	Available Voltage [V]	1 Phase 200V (-10%) ~ 240V (+10%)			
	Frequency [Hz]	50/60Hz (Min. 47 ~ Max. 63Hz)			
	Input Current [A]	5.4	9.7	16.4	24
Braking Transistor		Built in			
Protection Degree		IP20 (IEC 60529), UL open type (UL50)			
Cooling Method		Forced			
Weight (kg)		0.6	0.6	1.0	1.0

Dimension

www.nicsanat.com
021-87700210




Dimension

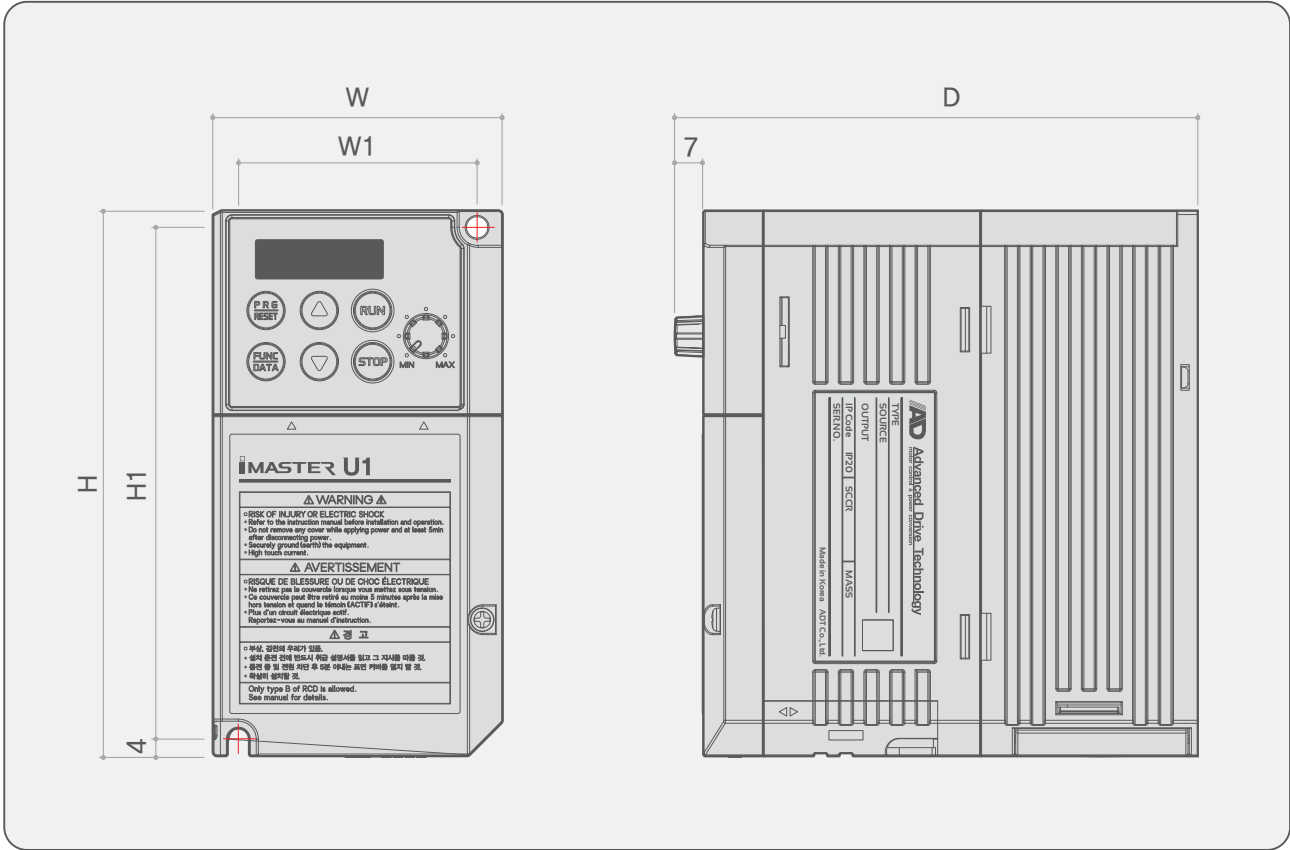

Applicable Motor [kW]	Model	Frame	W(mm)	W1(mm)	H(mm)	H1(mm)	D(mm)
3-Phase 400V	0.4	U1-0040-4	108	96	128	120	146
	0.75	U1-0075-4					
	1.5	U1-0150-4					
	2.2	U1-0220-4					
	3.7	U1-0370-4	F3	140	128	128	120
Single-Phase 200V	0.4	U1-0040-7	68	56	128	120	123
	0.75	U1-0075-7					
	1.5	U1-0150-7	108	96			
	2.2	U1-0220-7					

■ Connection Diagram

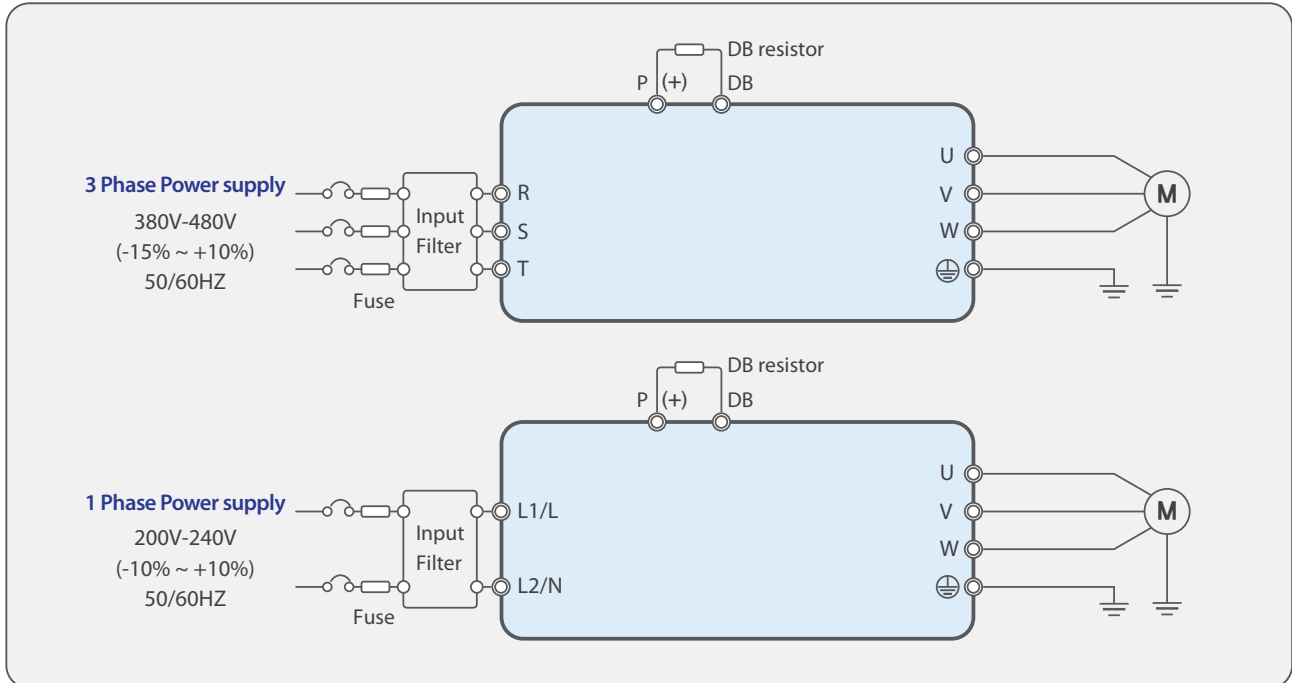

■ Wiring Diagram

